

□ □□ □□□ □□□

□□

1. □□ □□□ □□□□ □□□ □□ □□□□ □□□ □□□ 1D □□□□ □□□□□□□.
2. 20 □□ □□, 5 □□ □□, □□□ □□□□□ □□ □ □□□
3. □□ □□□ □□ □□□ □□□□ □□□ □ □□ □□ □□□ □□□□□□
4. □□□ □□□ □□, □□□ □□□ □□ □□□□□□□ □□□□□
5. □□ □□□□ □□□ □□□□ □□ □□□ □□□ 2 □ LED □□□ □ □ □ □□□
6. □□□ □□ □□ □□□ □□□ □ □ □□ □□□ □□ □□□□ □□ □ □□□ □ □□ □□□ □□□□.
7. □□ □□ □□□□□□ □□□□ □□□ □ □□□□□ □□□□ □□□ □□□□ □□□□□□.

□□ □□

□□ □□ □□□□, □□□, □□□ (□□, □□□, □□ □□, □□ □□ □)□□ □□□□□.

□□ □□ □□

□□

□□ □□ (□□□□ □□)

□□ □□

□□ □□

□□ □□

□□ □□□

□□ □□

LED □□□

□□

□□□ □□□ □□□□□

□□□ □□□□

□□

□□

□□□

□□ □□□ □□□□

650nm

0 ~ 200mm

@ UPC / EAN

PCS = 90 %

5 □□ □□

20 □

□□ 1650 □□

0.1mm

30 % (UPC /

EAN 100 %)

2 □□ □□ LED

(□□ & □□)

□□□□ □□□ □ □□

□□□

HID USB,

USB □□ COM,

RS232

LxWxH :

114mm *

114mm *

156mm

290g (□□□□ □□)

□□ 1.8M

□□ □□ □□

□□

EMC

□□□ □□

□□□ □□

5vdc +/- 10
%

CDRH Class
IIa, IEC
60825-1
Class 1 □□

UPC / EAN /
JAN, UPC-A □
UPC-E,
EAN-8 □
EAN-13,
JAN-8 &
JAN-13, ISBN
/ ISSN, Code
39 (□□ ASCII
□□), Codabar
(NW7), Code
128 & EAN
128, □□ 93, □
□□□ 2/5 (ITF),
□□ 2/5, IATA
□□, MSI /
Plessy, □□ □□
□□, □□ 32 (□□
□□
Pharmacode),
RSS 14, RSS
Limited, RSS
□□

[□□□-□□:~](#)



CAUTION  **LASER LIGHT, WHEN OPEN
DO NOT STARE INTO BEAM**
Complies with IEC 60825-1 and IEC 60825-2
permanently Laser Notice No. 50 dated July 14, 2011
THOROS II (1906A) 1, 2011-2012 2011
ACCURACY: 1/8" @ 33' ± 0.004"
FLARE LASER PRODUCTS LTD. 1906A-001



CAUTION  **LASER LIGHT, WHEN ON, DO NOT STARE INTO BEAM**
CONTAINS BATTERIES. DO NOT OPEN TO AVOID THE BATTERIES.
PARTS ARE NOT TO BE OPENED. DO NOT TOUCH THE BATTERIES.
EMERGENCY: 1-800-4-A-LEVER (1-800-425-3873)
© 2005 LEICA LASER PRODUCTS, INC. (LPI)
CLASS 1 LASER PRODUCT - HAZARD FREE














How to Use This Barcode Scanner?

1. For better scanning function, please hold this scanner at right angle, don't decode it at 90°.

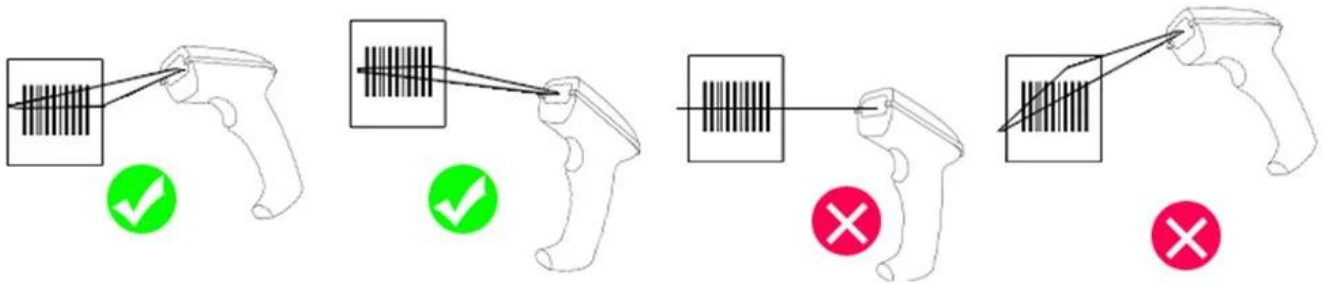

2. For truly decoding the barcode, scanning laser must cover the whole barcode.



How to Assemble/Disassemble the Cable?

Plug sharp things like toothpick or clip into the right hole and then pull out the cable easily.





Shakeproof



Super decoding



Compatible
different terminal



High Cost-Effective

WE PROVIDE THE MOST COMPLETE
PROFESSIONAL SCANNING APPLICATION



Logistics express
barcode



Supermarket
barcode



Medical
barcode



Factory
inventory



Machine
customization

Shipping



□□□ □□□□ □□□□





ACM26X RFID 26 34

125Khz wiegand 26/34 26 34,
 尺寸 : 115mm × 75.5mm × 16.8mm

ACM26G RFID 26 34

125Khz /13.56Mhz 26
 尺寸 26 / 34 / RS232

KR600E RFID 26

125KHz 26 ID / 13.56Mhz 26 34,
 Wiegand 26 26





ACM-EMI-S RFID 卡片

125Khz EM 卡片 卡片

卡片 86 * 54mm

ACM-MF1 RFID 卡片 卡片

MF1 1K 卡片 卡片

ACM-ABS003 RFID 卡片 卡片

卡片

125Khz EM / 13.56Mhz / UHF

Keyfob, 卡片 卡片 : 卡片, 卡片, 卡片, 卡片, 卡片, 卡片

卡片 卡片

-ACM Goldbridge 卡片 卡片 卡片 卡片 卡片 卡片 卡片 卡片. ACM Goldbridge 卡片 卡片 卡片 2 卡片 卡片 卡片.

-□□□ □□□ □□□ □□□ □□□□□□.

- 1, 24 小時 24 小時 24 小時
- 2, 24 小時 24 小時 24 小時, 24 小時 24 小時 24 小時 24 小時 24 小時
- 3, OEM / ODM
- 4, 24 小時, fashion desing, 24 小時 24 小時 24 小時, 24 小時 24 小時
- 5, 24 小時 24 小時 :
 - 1), 24 小時 24 小時 24 小時 24 小時 24 小時
 - 2), 24 小時 24 小時 24 小時 24 小時
 - 3), 24 小時 24 小時 2-3 24 小時 24 小時 24 小時 24 小時
- 6, 24 小時 : 1 ~ 5 24 小時 7 ~ 30 24 小時 24 小時
- 7, 24 小時 : 24 小時 24 小時 : T / T, 24 小時 24 小時, 24 小時
- 8, 24 小時 : 24 小時 24 小時 DHL, 24 小時, TNT, UPS EMS, 24 小時 24 小時 24 小時, 24 小時 24 小時 24 小時.

11/11

: 0000 00 0000 000 00 000 000000. 00 00 00 00 0 00 00 000 000 000 000 00 000 000000.

: 00 00 0 T / T, 000, 000 000.

□□□ □□, □□ □□ □□□□□ (DHL, FedEx, TNT UPS □)□ □□□ □ □□□□.

: 000 00 000 00, 00 000 00.

: 5000pcs 3-7 100,000pcs 7-15

: 00 00 00, 0000 00, 00, 00 0 00. OEM 000 00 00000.

RFID / NFC / RFID keybod / RFID , RFID 20 .