



□□ □□ □□ **12V 5A** □□□ □□□ □□□□ □□□ □□
□□ □□□

5A □□ □□ □□ □□

□□□ □□ □□ □ □□ □□ □□□□ □□□□.

□ □□ □□ □□□ □□□, □□□ □□ □□□ □□, □□ □□ □□□ □□

□□ □□□ □□□□□ □□□□□.

$\frac{1}{2} \sqrt{\frac{2}{\pi}}$

m

[illegible]



圖例說明

- 1 : 圖例 1 COM 圖例, 圖例說明 圖例, 圖例說明 圖例 DC12V, 圖例說明 圖例 (0-15 圖例, 圖例, 3 圖例 圖例);
- 2 : NC 圖例 1 COM 圖例, 圖例說明 圖例 圖例 DC12V, 圖例說明 圖例 圖例, 圖例說明 圖例, 圖例說明 圖例 (0-15 圖例, 2 圖例, 3 圖例);



3 : DC12V 電源 1個, 4個 電源, 5 電源;

4 : 電源 1個 (電源 1個, 1個) 電源 1個 電源 1個 電源 1個 電源 1個 電源 1個 (電源 1個, 1個) 電源 1個 電源 1個.

5 : 電源 1個 (電源 1個, 1個 電源) 電源, 電源 1個 電源 1個 電源 1個 電源 1個 電源 1個 (電源 1個, 1個 電源) 電源 1個;


6 : 電源 1個 電源 1個 電源 1個 電源 1個 電源 1個 12V 電源 1個 電源 1個



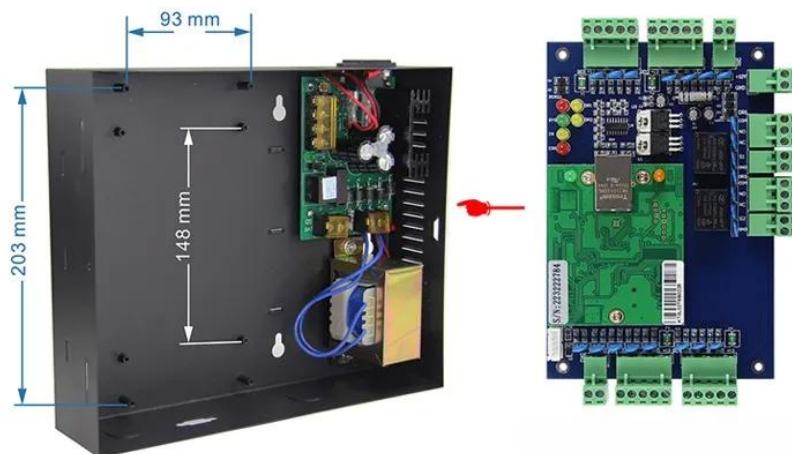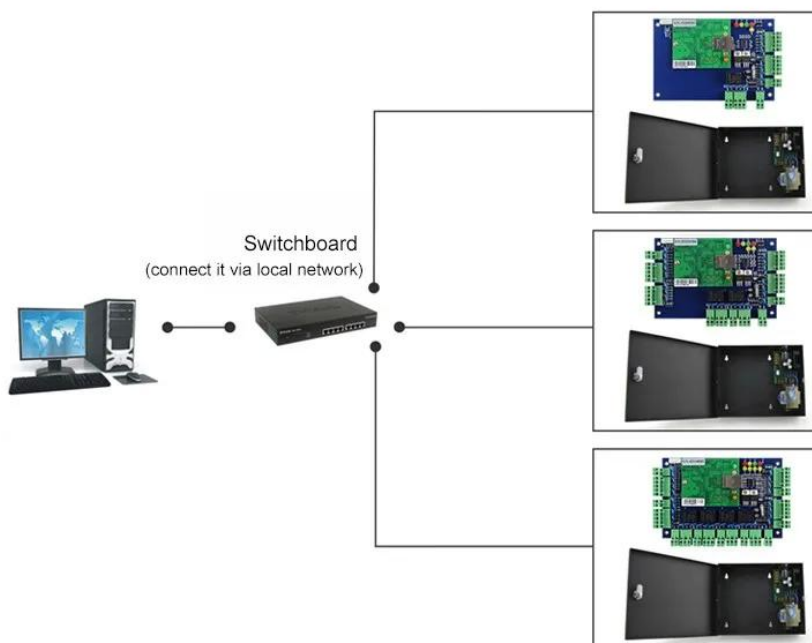

Kindly remind:

All network control board must configure with access power supply.
1 board for 1 power supply

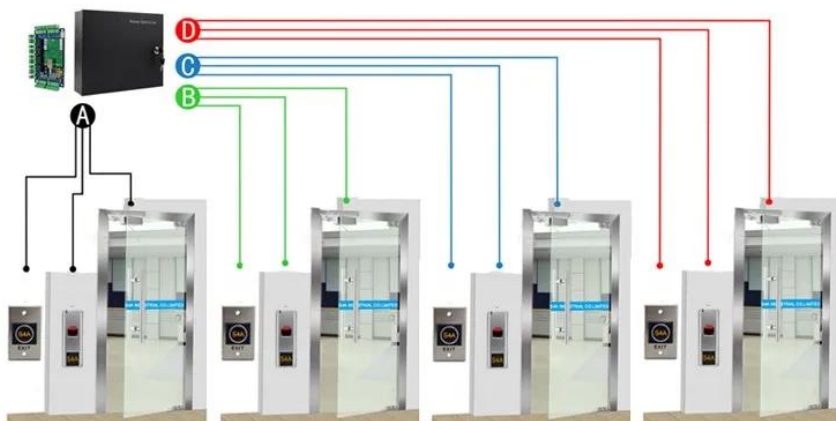

ACM-WEG04

Four doors 1 way: Control 4doors (Enter by Swipe cards and Exit by Push button)

Scope of Application



Port



School


























ॐ नमो भगवते वासुदेवाय ॥
 ॐ नमो भगवते वासुदेवाय ॥
 ॐ नमो भगवते वासुदेवाय ॥



□□ □□ (□□ □□ □□)

[illegible]

You May Like



ACM-K2A / B.

□□ □□ □□ LED□□□□ □□ □□ □□



ACM-Y280.

□□ □□ □□□ (280kg / 600lbs)



ACM-Y806-5A.

□□□□ □□□□□□ □□ □□ □□ 5A



ACM225.

RFID 12KHz.



ACM-210.

RFID Wiegand



ACM26X.

125KHz EM RFID : 115mm × 75.5mm × 16.8mm

RFID

ACM Shenzhen Goldbridge

RFID 20 , RFID , RFID , RFID , RFID .

