

00 00

WBK-400-1-12 00 000000 00 000000 00 00 00 00 000000. 00 0000 0000 00 0 00 00 000000.

6
2
L
x
4
3
. 

x
3
H
(
m
m
)
1
2
V
D
C
(




2
4
V
D
C
)
8


A






[illegible]

Verification Code Using Achieves Anti-Counterfeiting
REMOTE CONTROLLER FOR ACCESS CONTROL
Concentration, Profession, High quality



WBK-400-1-12 is the remote control dedicate to Access Control .with metal transmitter for access control .
The Transmitting Distance is $\leq 50\text{m}$ (in the open area).

01


EFFICIENT CONNECTION

Remote Transmission, Signal reaches
in 50m(Barrier Free Area)



CHIPS WITH STABLE PERFORMANCE

Confidentiality, Stable Performance,
Low Consumption etc.

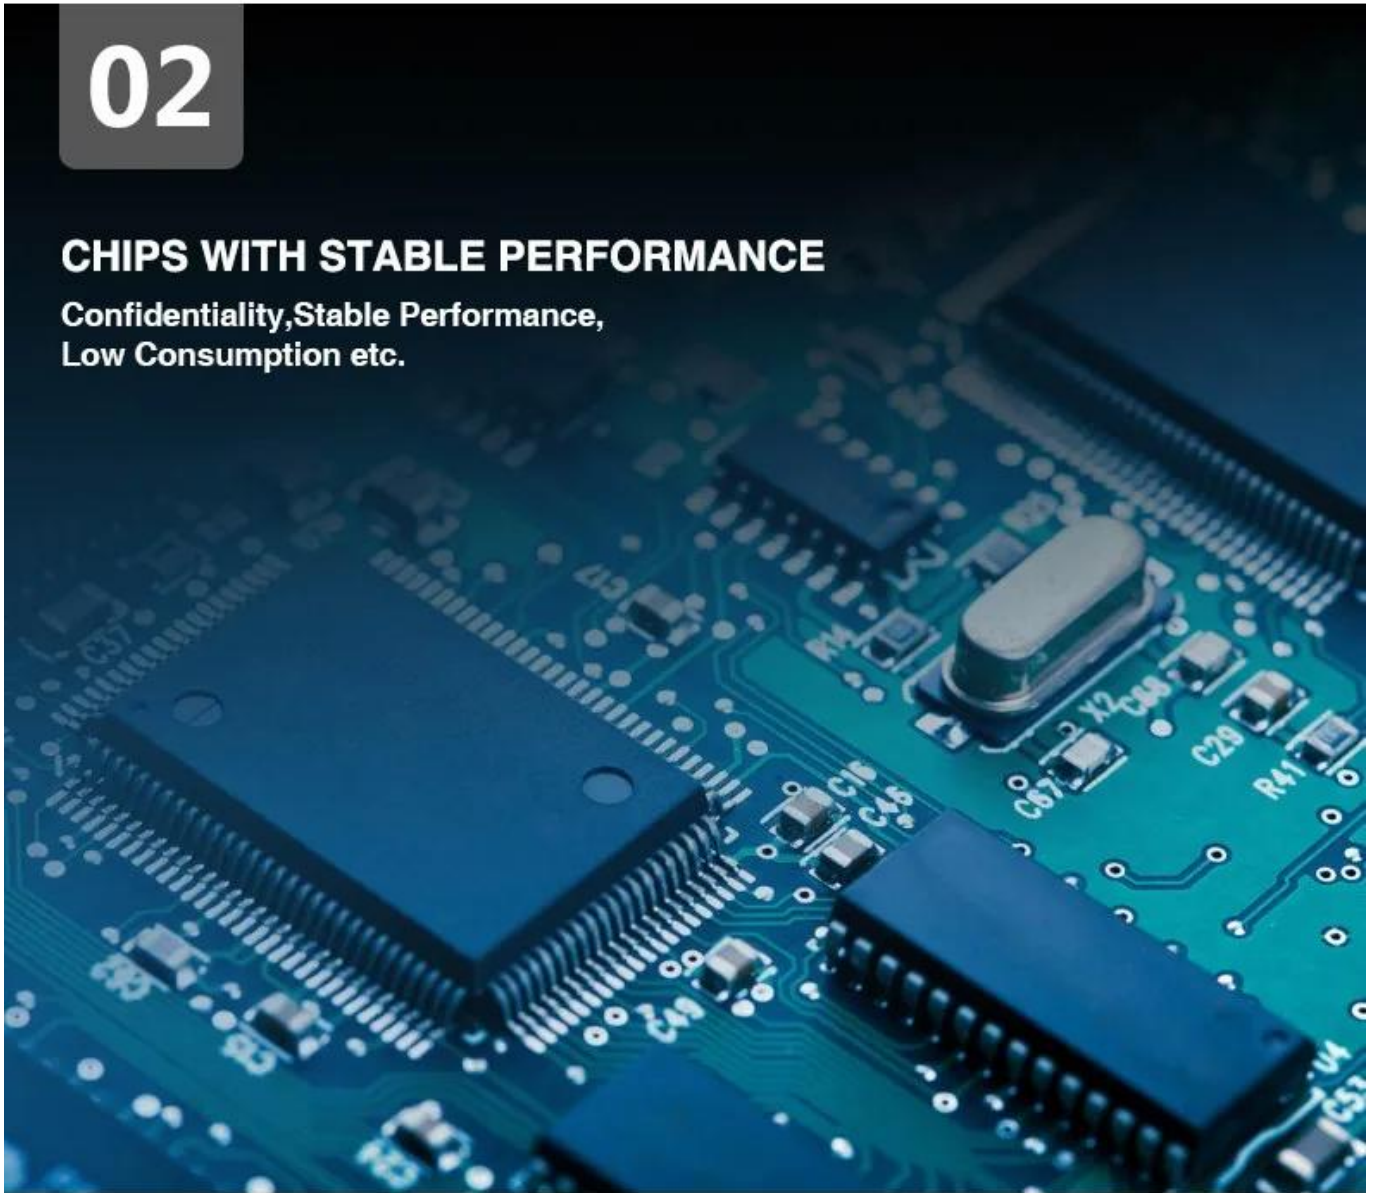

03

EASY OPENING

No Need To Take Your Keys, Your Phone
Can Achieve Unlocking Your Door



HIGH QUALITY,HIGHLIGHT OUR STRENGTHS



Sandblasted&Pressure casting

Advanced Manufacturing
Process&Wearproof Material

Metal Transmitter


Exquisite&Fashionable



Easy Operation

Self-Learning Function,
Verification Codes Achieve
Anti-Counterfeiting Function

Wiring Diagram

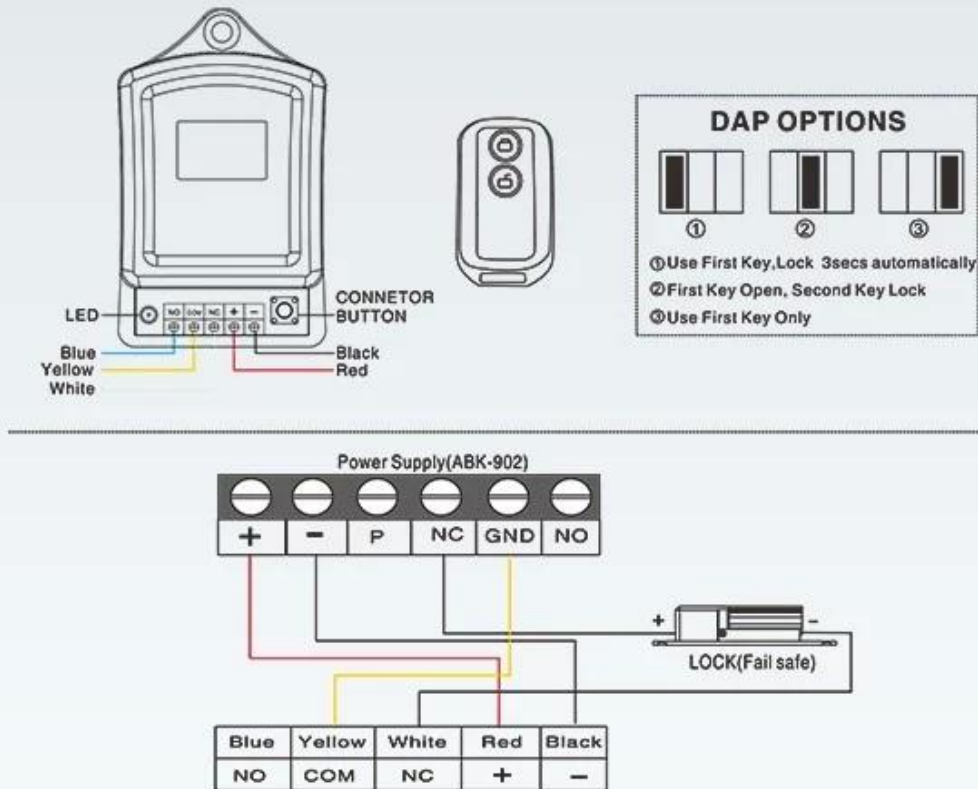

00 00

000 2000 000 00000 RFID 000 00 000 0 000000. 0000 00 00 00
 0 00 0000 00 0000 0 00 0000, 0000 0000 0000 00 00 00 00 / 00 0000

0000 0000 00 0000. 000 000 000 000 0000 000 00 0000 0000
 0000 CO, FTA, 00 F, 00 E ... Ect. 000 000 000 00 000 0000 0
 00 00 0 0000. EXW, FOB, FCT, CIF, CFR ... 00 000 0000 00
 000. 000 00 0 000 00 000 000 0000 0 0 0000.

0000 5 0 00

000 00 000 00 00000 000 0 0000. 00, 00 00, 00 0000, 0 000. 000 000 000 00 000 0000000. 00 0000 0000 0
 0 000 00 000 0000.





No touch Door Realese Exit 金

K2B : 86 * 86mm

No touch Door Realese Exit 銀

K9A : 115 * 40mm

金 銀 銀, (銀 銀 銀 銀, NO / NC) K5B :
86 * 86mm





□□ □□□ □□, (□□ □□□□, NO), K4B : 86 *
86mm

□□□□□ □□ Hihg □□ Kirsite. K14B : 86 *
86mm

□□□□□ □□ □□ □□ □□ □□; K815B : 86 *
86mm

□□□□ □□□□

- 1, □□ □□□□ 24 □□ □□□□ □□□□□□
- 2, □□ □□□□ □ □□ □□, □ □□□ □ □□ □□□□□□.
- 3, □□□□ OEM / ODM
- 4, □□□□, fashin desing, □□□□ □ □□□□□ □□, □□ □□ □□

