
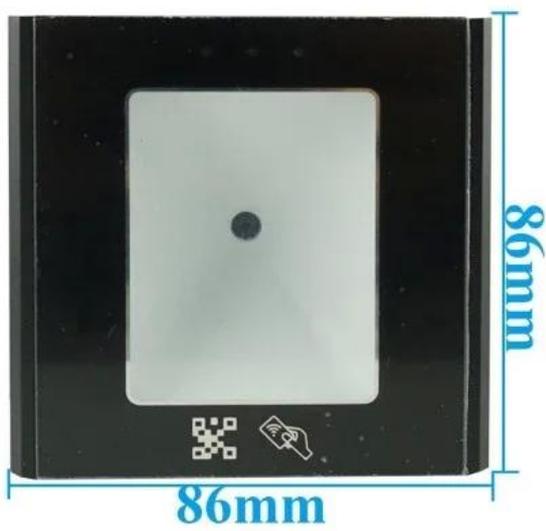



□□:

- Wiegand □□□□ □□□ □□ QR □ RFID □□
- □□ □□ : DC 4-15V □□□ □□ □□
- □□□□ □□ □□ □□
- □□ □□□ □□ □□ □□ □□□□□□.
- □□ □□ □ 0-20cm□□ □□ □□
- LED□ □□□ □□□ □□□□□□.
- 2 □ □□□ □□ □□ □□□ SDK

Terminal port								
Feature	VCC	GND	DO	D1	LED	BEEP	TX/R+	TX/R-
	DC 12	Negative	DATA0	DATA1	LED control	sound control	RS485+	RS485-

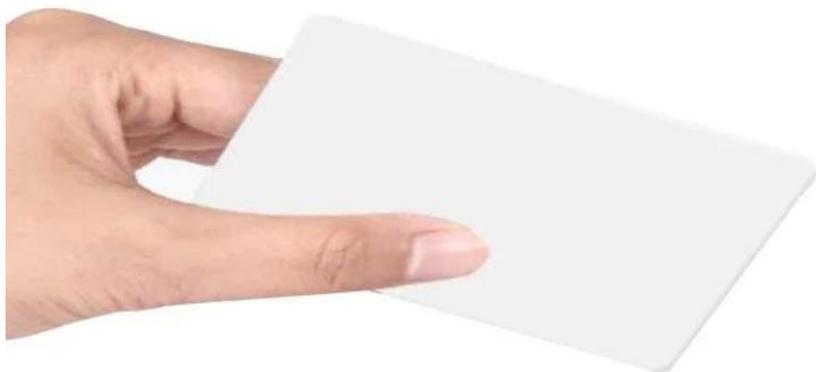

□ □□□ □□□ USB Biometrics □□ □□ □□□□ Windows 2000 / XP / 2003 / Vista / 7 / 8 (32 / 64bit) □ □□□□□. □□
 □ □□□□□ SDK □ □□□□□. □□□□ □□□ □□□□ □□ □ □ □□□□. □ □□□ □□ □□, □□ □□, □□ □□, □□□□ □□□ □
 □□ □□ □□□ □□ □□□□□□.

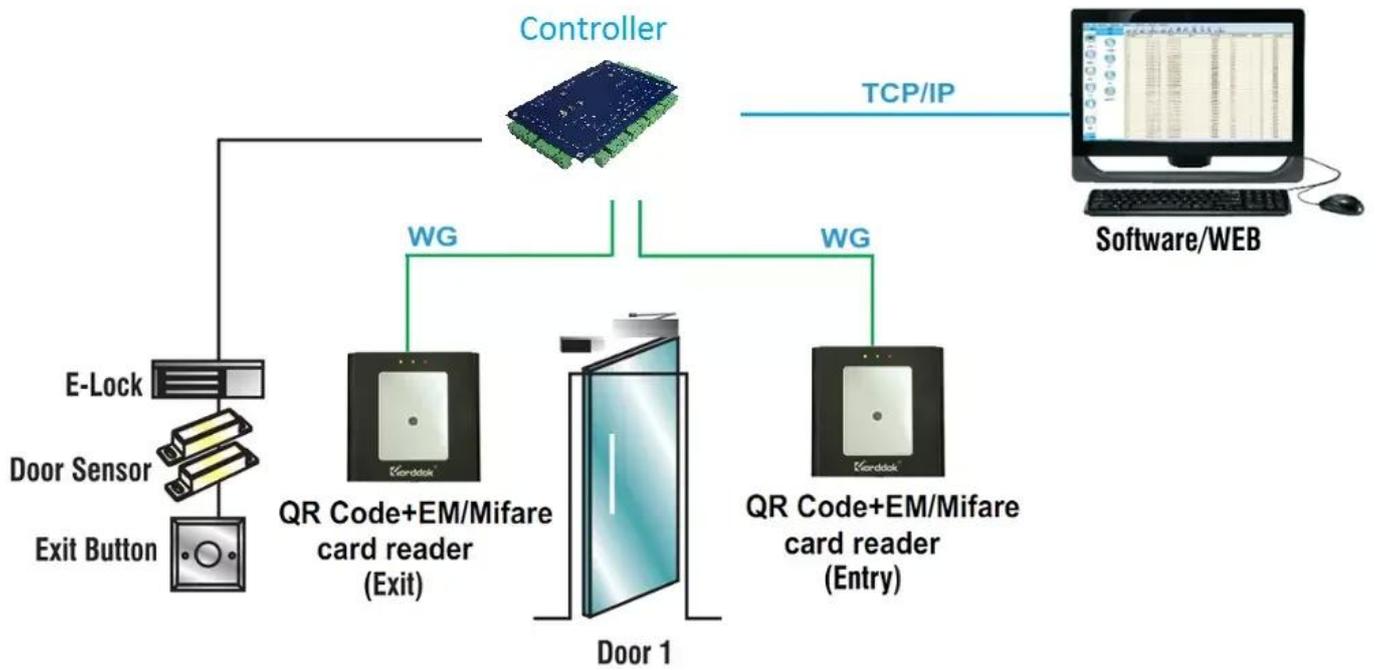

□□ & □□

□□ □□ □□□ □□□ □□□ □□□ □□ □ □ □□□ □□ □□□□□□. □□ □□□ □□□□ □□□ □□□ □□ □□□ □□□□□□. □□□□ □□
 □ □□ □□ □□□ □□□□□□.



□□ □□

□□□ 2000 □ □□ □□□□ RFID □□□ □□ □□ □ □□□□□. □□□ □□ □□ □□□ □□ □□□ □□ □□ □□□, □□□ □□□ □□□ □□□ □□□□ □□ □□ / □□ □□□ □□□□ □□ □□ □□□□. □□□ CO, FTA, □□ F, □□ E □ □□□ □□□ □□□ □□ □□ □□□□ □□ □ □ □□□□ ... □□. □□□ □ □□ □□□ □□ □□□ □□□ □□ □ □ □□□□ □□ □ □ □□□□. EXW, □□ □□, FCT, CIF, CFR ... □□ □□□ □□□ □□ □□□□. □□□ □□ □ □□□□□ □□□ □□□ □□□ □ □ □□□□.

□□ □□□□

□□□ □□ uhf □□ □□ □□, ACM812A□ □□□□□, □□□ □□ ACM802A, ACM818A, ACM801A□ □□ □ □ □□□□. □□□ □□ □□□□ □□ □□□□□. □□ ACM801A□ □□ □□ (□ □□ 200 □)□ □□ □ □□□ □ □□□□. □□□ □□□ □□ □□□ □□□□□□.





ACM812A
2-5m □□ □□ UHF □□□
Wiegand 26 □□, RS232 / 485

ACM818A
10-20m □□□ UHF □□
Wiegand 26 □□, RS232 / 485

ACM802A
8-10m □□ □□ UHF □□
Wiegand 26 □□, RS232 / 485

