



D  
C  
1  
2  
V  
(  
□  
□  
D  
C  
2  
4  
V  
□  
□  
□  
)□  
A  
A  
□  
□  
□  
□  
(  
Y  
-  
1  
3  
8  
N  
O  
)  
;  
□  
□  
□  
(  
Y  
-  
1  
3  
8  
N  
C  
)



## AdvanAtge.

ACM-Y138. 此系列之产品为... / ... Power-To-lock.It ... -Deformation ... PVC ...

... OEM / ODM ...


ACM-Y138 NO / NC ...



01

### Embedded Installation Design


Safe design to prevent external malicious lock slot is forced open.

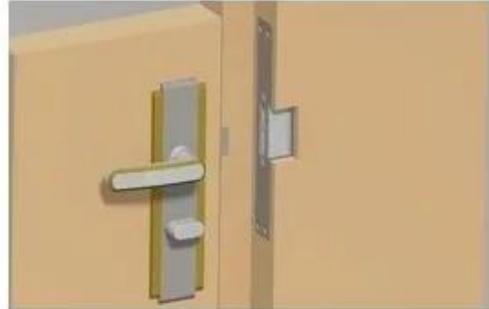

02

### Holding Strength

pass 500kg super linear static

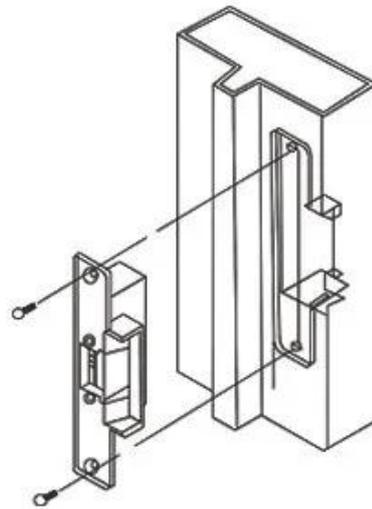

03

### Suitable For

Narrow Wooden Door, Narrow Metal Door



□□ □□  
□□□ DHL, □□□, TNT, UPS, EMS, □□□ □□□□ □□□ □□□□□□.  
□□ □□□ □□ □□□□ □□□ □□ □□□□.

□□  
□□ □□ □□ : 1 □□ □ 1unit, □□ □ 60pcs,





### ACM-Y131.

□□□□ □, □□ □□, PVC □□ □ □□□□ □□ □□ □  
□□□□ (NC / NO)



### ACM-Y132.

280kg (600lbs) □□ □□ □□ □□ □□ : □□□□□  
□, □□ □□, □□ □□, □□ □□ □□.

## You may need

□□□□□ □□□ □□□□ 3 □ □□ □□ □□□□□ !!!

□□□ 20 □ □□□ □□ □□□□ □□ □ □□ □□ □□ □□ □□ □□□□□□! □□□ □□ □□□□□□. □□□□ "□□  
□" □□!  
□□□ □□□ □ □□□ □□□ □□□□ □□□ □□□□ □□□□ □□□□.



**ACM-Y280.**

□□ □□ □□□ (280kg / 600lbs)



**ACM-Y100S.**

□□ □□ □□ □□ □□  
 □□ □□ □ NO / NCPOWER - □□ □□



**ACM-Y066.**

□□□ □□□ □□ □□ (□□ □□ □□)  
 □□ □□ : 130x98x41mmworking.

[□□.□□ □□□□.□□ □□□□.□□](#)



**ACM-WEG02.**

□□□□ 2 □□ □□ □□□ □□□ (RS232, RS485 □  
 □ TCP / IPCommunication)



**ACM-K2A.**

□□ □□ □□ Realese Exit □□, K2A : 115 \*  
 40mm; K2B : 86 \* 86mm



**ACM-Y806-3A.**

□□ □□ □□ □□ 12V / 3A



**ACM-Y280.**

□□ □□ □□□ (280kg / 600lbs)



**ACM-26X.**

125KHz Wiegand 26 / 34 □□, □□ :  
115mm x 75.5mm x 16.8mm



**ACM-EMI-S.**

125khz EM □□ □□