


□
□
□
□
2
6
/
3
4
/
R
S
~~□~~
~~□~~
~~□~~
R
S
2
3
2
/
T
C
P
/
I
P
□
□
□
□
/
□
□
□
□
□
~~□~~
~~□~~
~~□~~
□
~~□~~
~~□~~
~~□~~
~~□~~
~~□~~

□
 □
 : □
 □
 □
 □
 □
 □
 □
 : □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 8
 6
 *
 8
 6
 *
 4
 2
 □
 □
 m
 (□
 □ □
 *
 □ □
 *
 □
) □

□□ □□□

- :
- Wiegand □□□ □□ □□ □□ QR □ RFID □□
 - □□ □□: DC 4-15V □□ □□ □□
 - □□□ □□ □□ □□
 - □□ □□□ □□ □□ □□□□ □□
 - □□ □□ □ 0-20cm □ □□ □□
 - LED □ □□□ □□□ □□□□□.
 - 2 □ □□□ SDK □□ □□

Terminal port								
Feature	VCC	GND	D0	D1	LED	BEEP	TX/R+	TX/R-
	DC 12	Negative	DATA0	DATA1	LED control	sound control	RS485+	RS485-

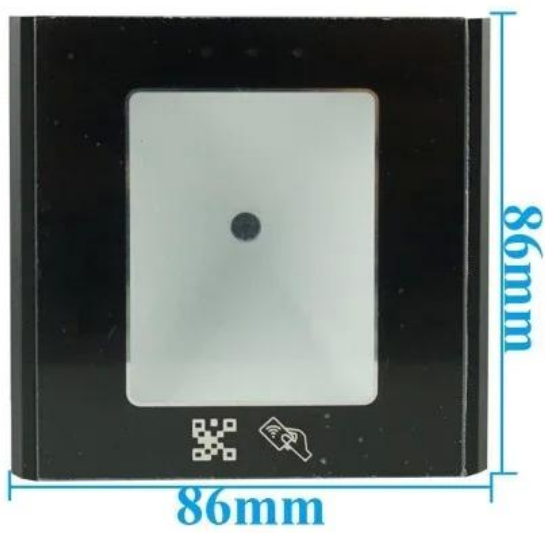

□ □□□ USB □□ □□ □□□□ Windows 2000/XP/2003/Vista/7/8(32/64bit)□ □□□□□. □□□□□□ SDK□ □□□□□□. □□□□ □□ □□□□□□ □□□□ □□□□ □□□□ □□□□□□. □ □□□ □□ □□, □□, □□, □□ □□□□, □□□□□ □□□ □□ □□ □□□□ □□ □□□□□□.

