

Floor Concealed Door Closers

The overhead or floor mounted concealed door closer is a very common type of door closer mechanism which is normally unseen and


unnoticed. ... Some concealed closers only allow single directional control for opening and closing to a fixed point or door stop.

Maximum door weight	180kg
Maximum door width	1200mm
Maximum torque	165Nm
Noise	<60dB
Opening and closing time	6-12S
Open range	86°~95°
Power supply	AC220V ±10% 50/60Hz
Rated power	55W
Special machine power	<2W
Operating temperature	-20°C~55°C
Protection level	IP68
Control box size	156x120x46mm
Unit size	320x110x70mm

Products Feature






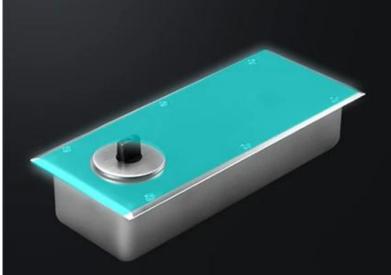

NO.2

Sealing rubber panel




NO.3

Sealed waterproof rubber ring



NO.4

One-piece stretch molding without leakage




NO.5


Motor adopts integral injection molding, waterproof



NO.6


Glue filling and sealing process for outlet

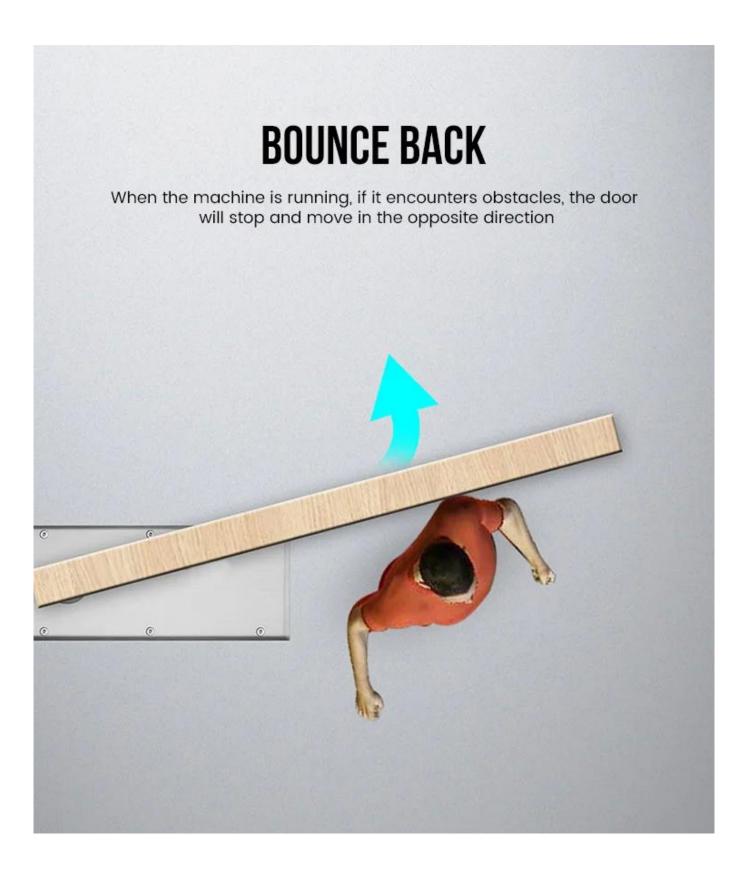


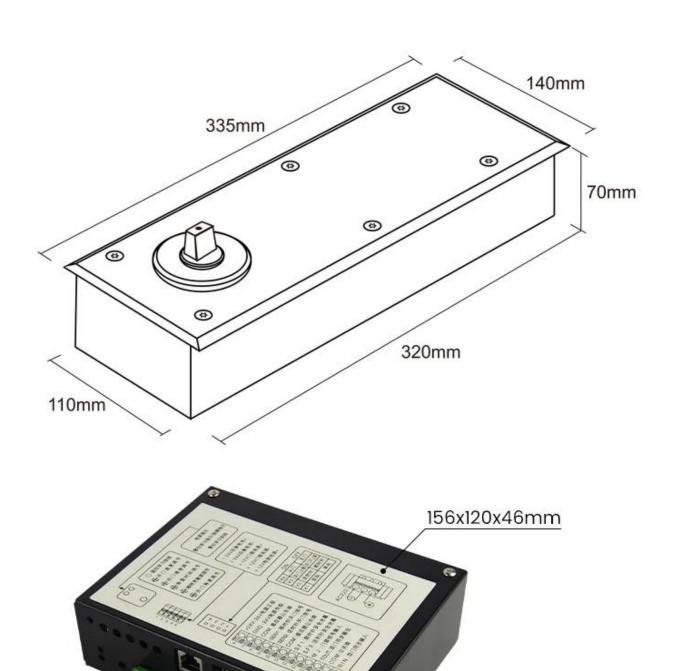

INSTALLATION DIAGRAM

Automatic door installation diagram

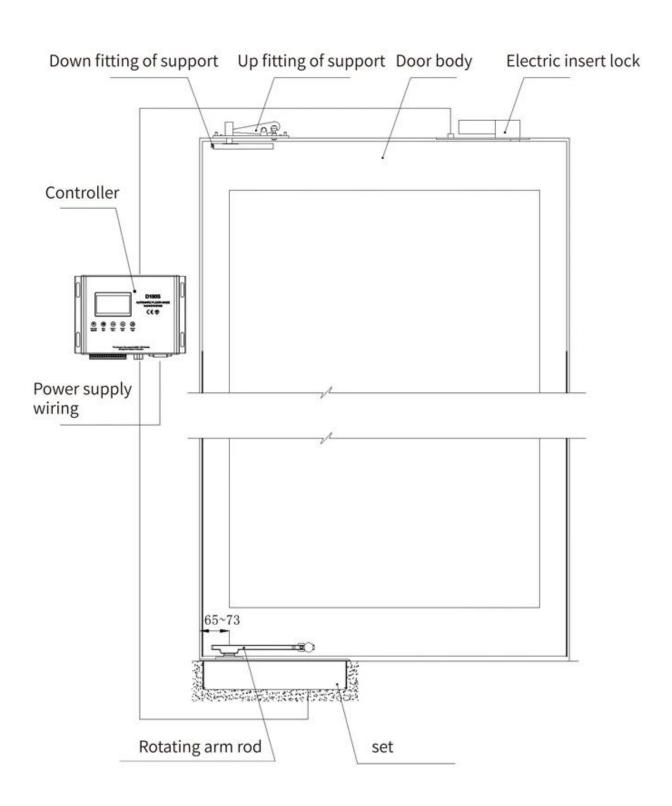

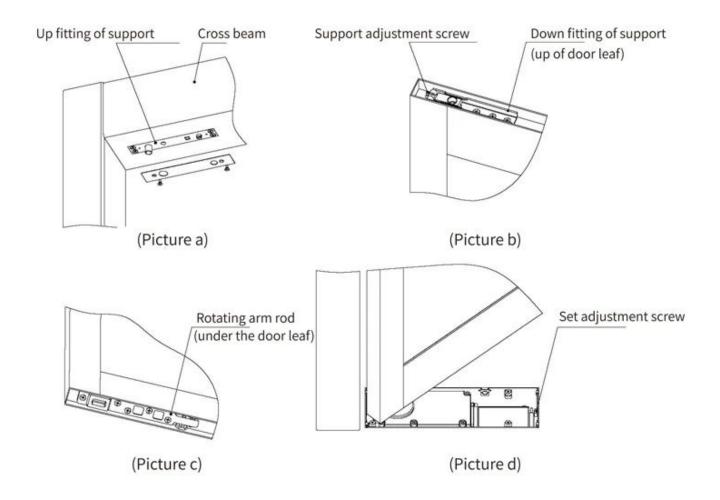

Quality Warranty

- Warranty Service will be honored if the damage is not caused by human, ACM Goldbridge provides 2 years warranty for relative products.
- On the contrary, ACM Goldbridge will cahrge extra if repair.
- More information, please browse our service center.

Related Products

We are professional comprehensive security access control products supplier with 20 years experience, we make sure to offer the

best solution of access control system solution! So, send your inquiry details in the below, click "Send" now!

Recommended by seller

You May Need

Complete Door Access Control Solution Provider













RFID Card

RFID Key fob

RFID Wristband







RFID Reader

Long Distance UHF Reader

Access Control Reader