

Automatic Sliding Door Kit for Glass Door Microwave Sensor Touchless Open Automatic Door Opener

Micro computer intelligent control, advance machinery manufacturing.

Adjust door-leaf status automatically, can manual adjust it if necessary. .

Low noise, sliding smoothly.

Brushless DC servo motor.long service life.


Interlock; Electric Lock; Compatible with access control system.

Can hold Max. 300KG Door-leaf

Easy Installation.

Products Feature




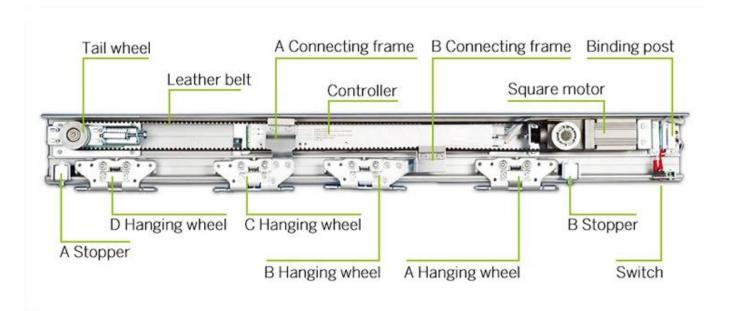


Controller




- A: Direction Control B: Channel Adjustment
- D: Opening Speed
- E: Slow Movement Distance in Door Opening
- F: Closing Speed
- G: Slow Movement Distance in Door Closing
- H: Slow Movement Speed
- 1: Open Time

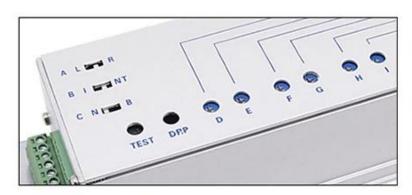







- 1. Safety beam
- 2. Access Control Signal Input
- 3. Interlock Input
- 4. Common Line

- 5. Interlock Output
- 6. Common Line
- 7. OV
- 8. 12V Output
- 9. OV
- 10. 24V Back Up Power Supply
- 11. +12V Lock Output
- 12~16: Remote Controller Interface

Electric motor

Square motor



Remote Controller







A: NC

B: NO

C: Half Open .

D: Normal

| Specification | Series | | |
|---------------------|-----------------------------|---------------|--|
| Door-leaf Type | Single-leaf | Double-leaf | |
| Door-leaf Weight | Max.150Kg | Max.150Kg*2 | |
| Door-leaf Width | DW=750-1600mm | DW=650-1250mm | |
| Total Width | W=1500-3200mm | W=2600-5000mm | |
| Mounting Type | Surface Mounting | | |
| Power | AC90~240V, 50HZ | | |
| Opening Speed | 15~46cm/s (adjustable) | | |
| Closing Speed | 13~46cm/s (adjustable) | | |
| Hold-Open Time | 0~8S (adjustable) | | |
| Manual Push Force | <40N | <50N | |
| Motor | DC24V Brushless Servo Motor | | |
| Ambient Temperature | -20°C~50°C | | |
| Weight | 10.58kg | | |


Microwave detector

24.125GHZ microwave sensor module



Installation door size

General door is divided into single open and double open

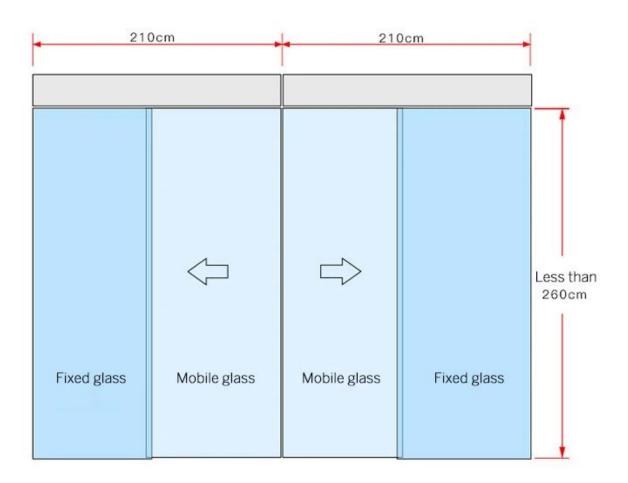

Installing


Fix slide way with DH+55mm height above the ground


- 1. Drill holes on slide way and steel structure or wall.
- 2. Use spirit level to test both ends of slide way.
- Use two screws to fix two ends of slide way on steel structure or wall temporarily.
- Revise the level again, then use screw to fix slide way on stel structure or wall finally.


Note:

Must keep slide way horizontal.

DH means the height of swing door-leaf
The height above the slide way is more than 50mm



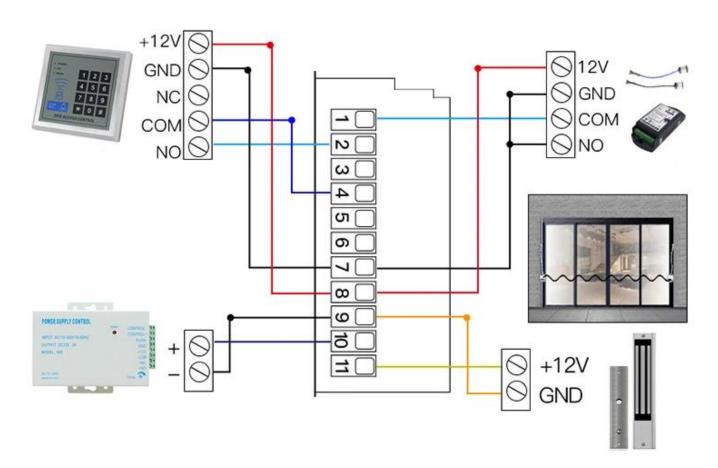

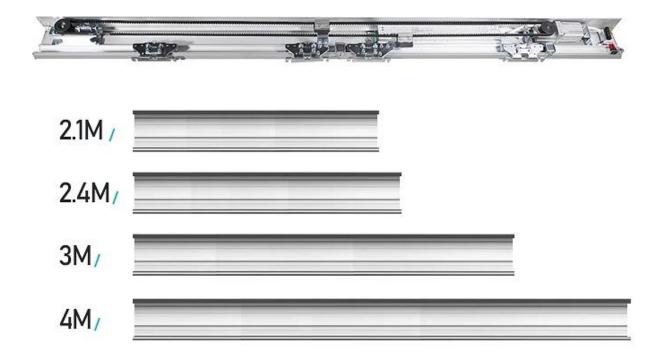

Quality Warranty

- Warranty Service will be honored if the damage is not caused by human, ACM Goldbridge provides 2 years warranty for relative products.
- On the contrary, ACM Goldbridge will cahrge extra if repair.
- More information, please browse our service center.

Related Products

We are professional comprehensive security access control products supplier with 20 years experience, we make sure to offer the

best solution of access control system solution! So, send your inquiry details in the below, click "Send" now!

Recommended by seller

You May Need

Complete Door Access Control Solution Provider













RFID Card

RFID Key fob

RFID Wristband







RFID Reader

Long Distance UHF Reader

Access Control Reader

WHY CHOOSE US?

Long History & High Reputation

Founded in 1999. Great Creativity Group dedicates in R&D, producing and sale of RFID products and Plastic Card. We own 12,000 square meters factory, 3000 square meters office and 8 branches so far.

Advanced Equipments & Ultimate Production Ability

2 Modern high standard production lines with monthly output 30,000,000pcs cards. Brand-new CTP machines and Germany Heidlberg offset printing machines. 10 sets of compounding machines.

Self R&D Customization

Our company offering management application project, equipment application, scheme and personalized RFID end product.

Strict Quality Control

Strict QC System from raw material to finished products.

We have passed certifiated ISO9001, SGS, ROHS, EN-71, BV etc.

We promoise all products will be examined strictly and
we ensure that the products we deliver to you with top quality.

Honers & Certificates

