

Descrição do produto



Leitor de proximidade de controle de acesso comunitário de escritório à prova d'água IP68 Wiegand 26 125 Khz ID EM Card RFID Leitor de cartão de controle de acesso

ACM-08E é um leitor de cartão de identificação Wiegand sem contato de 125 KHz, usando design avançado de circuito de recepção de radiofrequência e integrado microcontrolador, combinado com algoritmo de decodificação eficiente, para completar o cartão de identificação compatível somente leitura em 4100 de 64 bits (EM cartão) tem as características de alta sensibilidade de recepção, baixa corrente de trabalho, fonte de alimentação DC única, baixo preço e alta desempenho. O design à prova de poeira, à prova de umidade e totalmente vedado é conveniente para os usuários instalarem sob condições adversas, como

como ao ar livre, sem desgaste mecânico e é durável.

A
G
M
e
B
D
d
o
m
o
d
e
l
o
F
Z
B
K
h
ê
n
c
i
a
T
Z
m
p
Z
B
C
t
u
r
a
o
p
e
r
a
c
i
o
n
a
l
K
m
%
d
a
d
e
o
p
e
r
a
c
i
o
n
a
l

U
E
h
z
W
o
d
e
t
r
a
b
a
l
h
o
C
m
A
h
e
n
t
e
d
e
t
r
a
b
a
l
h
o
h
m
m
t
e
m
m
e
f
l
e
p
e
h
d
e
d
u
a
m
b
i
e
n
t
e
d
e
u
s
o
d
o
c
a
r
t
ã
o
)
P
o
e
t
o

Đ
b
m
ø
ñ
š
đ
ø
š
m
i
l
í
m
e
t
r
o
)
C
ã
p
b
ã
ø
d
a
r
d
ã
n
t
i
f
i
c
a
ç
ã
o
(
T
K
4
1
/
E
M
4
1
e
t
c
.
)

M
B
S
e
p
l
á
t
t
i
c
o
p
u
l
v
e
r
i
z
a
d
o
,
p
r
e
e
n
c
h
i
d
o
c
o
m
c
o
l
a
d
e
r
e
s
i
n
a
p
r
e
t
a
(
e
f
e
t
i
v
a
m
e
n
t
e
à
p
r
o
v
a
d
'
á
g
u
a
)

A
h
m
p
a
f
n
h
a
n
p
e
i
n
t
e
g
r
n
d
b
a
r
L
E
D
e
c
a
m
p
a
i
n
h
a
P
e
S
o

Imagens detalhadas

EASY INSTALLATION

Stable performance, firm and durable
wall-mounted installation



1. Draw marks and punch holes



2. Upper screws secure the rear cover



3. Mounting front cover

4. Screw the screws on the bottom




IT CAN ALSO BE INSTALLED OUTDOORS




IP68 PROTECTION DESIGN

The inside of the reading head is filled with glue, fully
waterproof, rainproof, and high protection level


Two-color indicator light



Standby mode



Trigger state



IP68 PROTECTION



Sealer resin adhesive



Finished product

Flame retardant material



SUPPORT FOR CUSTOM

Products also provide logo shell customization

ODM



LOGO CUSTOMIZATION



COMPANYNAME



COMPANYNAME



COMPANYNAME



COMPANYNAME


Wiring instructions



WG26-34

WG card reader	RED		DV 12V	Access card reader
	BLACK		GND	
	GREEN		D0	
	WHITE		D1	
	BLUE		LED	
	YELLOW		BEEL	
	GREY		WG34	

This product is manual measurement, allowing errors ■

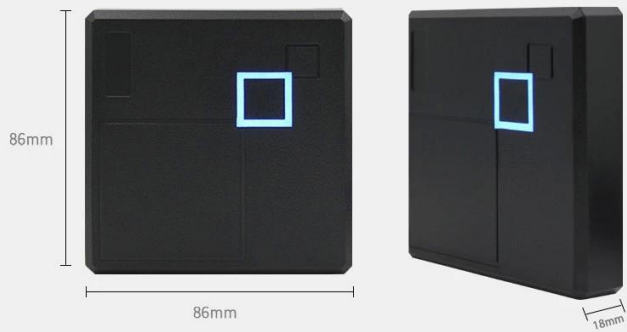

USAGE SCENARIO



Community gate



Office building gate



School gate



Elevator control system

gdzytech.en.alibaba.com