

ОГ



Автоматический комплект для раздвижных дверей для стеклянной двери микроволновый датчик беззаконный открытый автоматический открывающий

Микро компьютер интеллектуальный контроль, производство продвижения машин.

Отрегулируйте статус дверного листа автоматически, можно использовать его при необходимости. Отказ

Низкий шум, скользят гладко.

Бесщеточный DC Servo Motor.long Срок службы.

Блокировать; Электрический замок;

Совместим с системой контроля доступа.


Может держать макс. 300 кг дверной лист

Простая установка.

Особенность продукции

Automatic Sliding Door Operator



Aluminum shell / Security anti-leakage switch

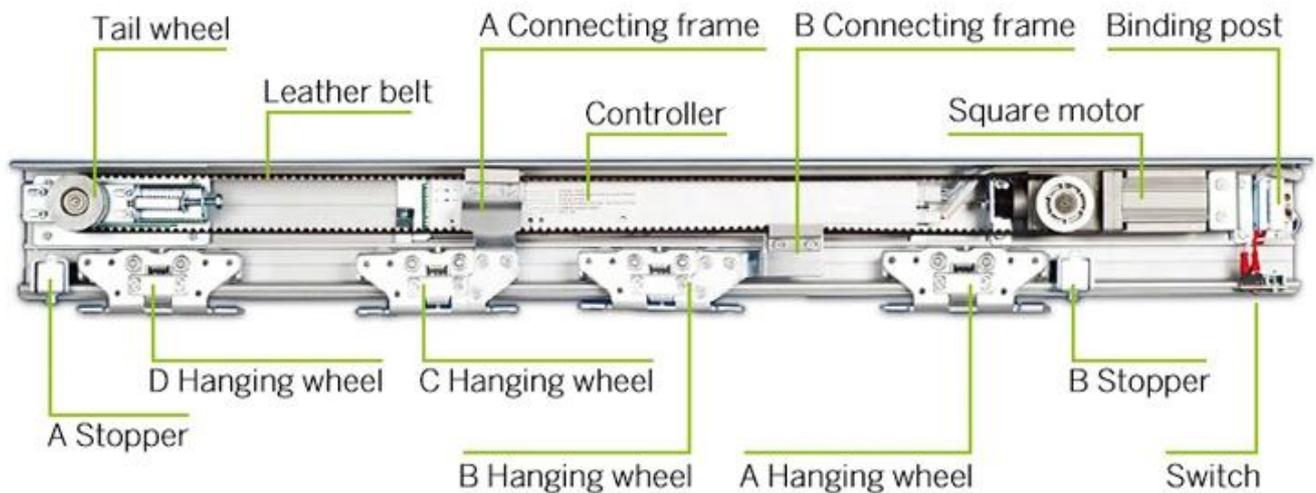

Controller



- A: Direction Control
- B: Channel Adjustment
- D: Opening Speed
- E: Slow Movement Distance in Door Opening
- F: Closing Speed
- G: Slow Movement Distance in Door Closing
- H: Slow Movement Speed
- I: Open Time

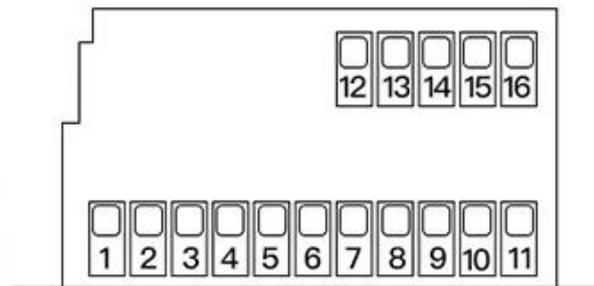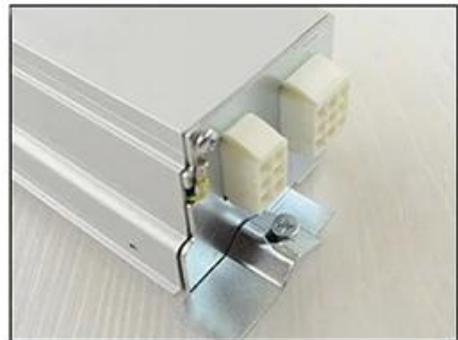


- 1. Safety beam
- 2. Access Control Signal Input
- 3. Interlock Input
- 4. Common Line
- 5. Interlock Output
- 6. Common Line
- 7. 0V
- 8. 12V Output
- 9. 0V
- 10. 24V Back Up Power Supply
- 11. +12V Lock Output
- 12~16: Remote Controller Interface

Electric motor

Square motor



Remote Controller

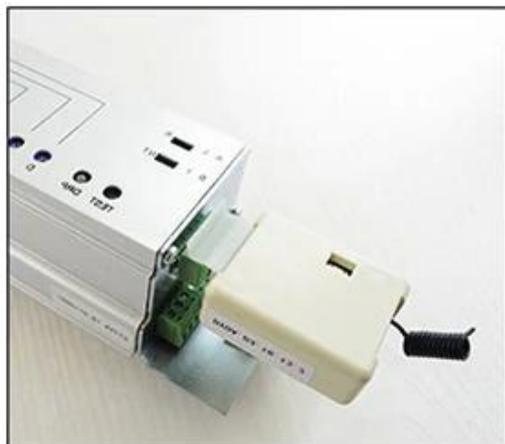

Transmitter

Receiver



- A: NC
- B: NO
- C: Half Open .
- D: Normal

Specification	Series	
Door-leaf Type	Single-leaf	Double-leaf
Door-leaf Weight	Max. 150Kg	Max. 150Kg*2
Door-leaf Width	DW=750-1600mm	DW=650-1250mm
Total Width	W=1500-3200mm	W=2600-5000mm
Mounting Type	Surface Mounting	
Power	AC90~240V, 50HZ	
Opening Speed	15~46cm/s (adjustable)	
Closing Speed	13~46cm/s (adjustable)	
Hold-Open Time	0~8S (adjustable)	
Manual Push Force	<40N	<50N
Motor	DC24V Brushless Servo Motor	
Ambient Temperature	-20°C~50°C	
Weight	10.58kg	


Microwave detector

24.125GHZ microwave sensor module



Installation door size

General door is divided into single open and double open

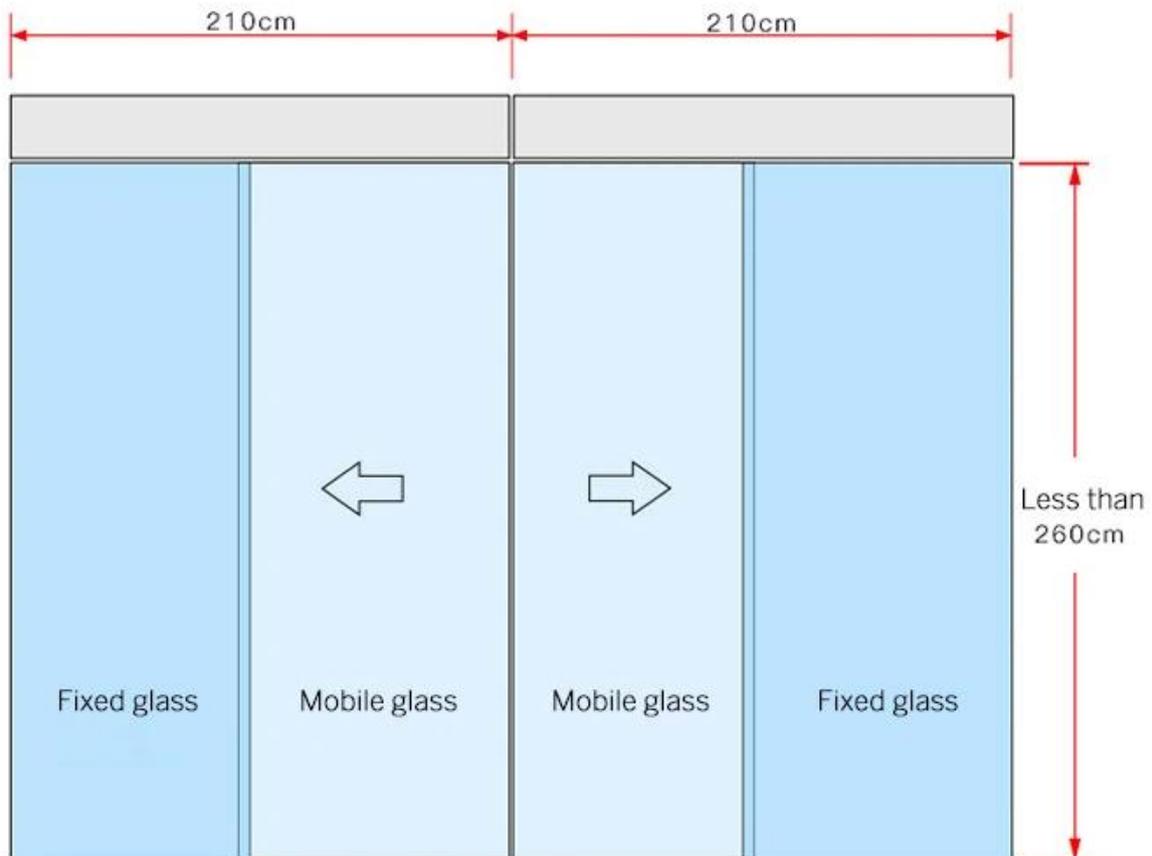

Installing

Fix slide way with DH+55mm height above the ground



1. Drill holes on slide way and steel structure or wall.
2. Use spirit level to test both ends of slide way.
3. Use two screws to fix two ends of slide way on steel structure or wall temporarily.
4. Revise the level again, then use screw to fix slide way on steel structure or wall finally.

Note:

Must keep slide way horizontal.

DH means the height of swing door-leaf

The height above the slide way is more than 50mm

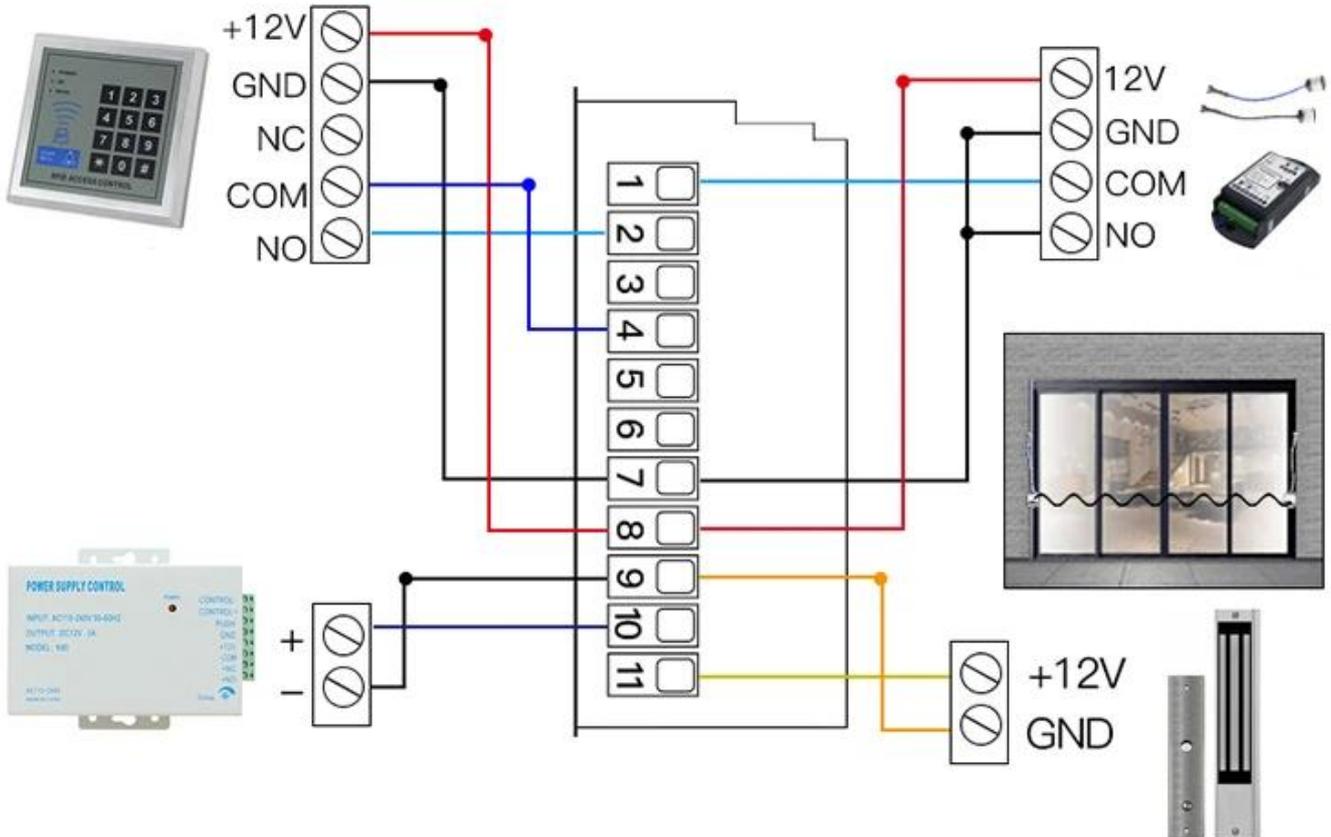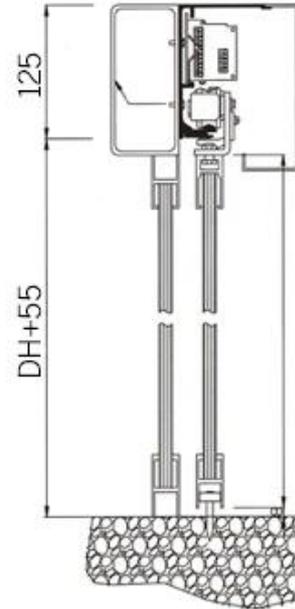



2.1M /



2.4M /



3M /



4M /



Качественная гарантия

- гарантийный сервис будет понасти, если ущерб не вызван человеком, ACM Goldbridge обеспечивает 2 года гарантии на относительную продукцию.

- Наоборот, ACM Goldbridge будет Cahрге Extra, если ремонт.

- Дополнительная информация, пожалуйста, просматривайте наш сервисный центр.

сопутствующие товары


Мы являемся профессиональными комплексными продуктами управления безопасностью поставщик с 20-летним опытом, мы обязательно предложили

Лучшее решение решения системы контроля доступа! Итак, отправьте ваши данные запроса в ниже, нажмите «Отправить» сейчас!

Рекомендуется продавцом

You May Need

Complete Door Access Control Solution Provider

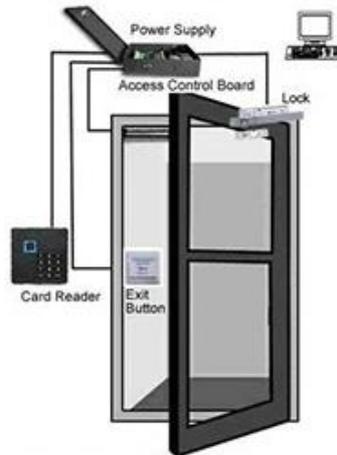

RFID Card



RFID Key fob



RFID Wristband



RFID Reader



Long Distance
UHF Reader



Access Control
Reader

WHY CHOOSE US?

- **Long History & High Reputation**

Founded in 1999. Great Creativity Group dedicates in R&D, producing and sale of RFID products and Plastic Card. We own 12,000 square meters factory, 3000 square meters office and 8 branches so far.

- **Advanced Equipments & Ultimate Production Ability**

2 Modern high standard production lines with monthly output 30,000,000 pcs cards. Brand-new CTP machines and Germany Heidelberg offset printing machines. 10 sets of compounding machines.

- **Self R&D Customization**

Our company offering management application project, equipment application, scheme and personalized RFID end product.

- **Strict Quality Control**

Strict QC System from raw material to finished products. We have passed certified ISO9001, SGS, ROHS, EN-71, BV etc. We promise all products will be examined strictly and we ensure that the products we deliver to you with top quality.

