

Descrizione dei prodotti

Serratura magnetica elettrica da 120 libbre con sistema di kit di controllo remoto

Forza di tenuta 12V 60 kg 120 libbre Serratura magnetica per porta in vetro senza telaio montata in superficie

Tipo: serratura magnetica da 60 kg

Materiale: scocca in lega di alluminio piastra di ferro

Forza di tenuta: 60 kg/120 libbre

Tensione di lavoro: DC 12V

Corrente di lavoro: 110 mA

Umidità: da 0 a 95%

Temperatura di lavoro: da -10 a 55 gradi Celsius

Modalità di lavoro: accensione per bloccare, spegnimento per sbloccare

Lavoro per porta singola

Dimensioni: 80 x 37 x 24 mm/70 x 33 x 10 mm

Parametro del prodotto Parametro Descrizione

Dimensione blocco: 80x38x25 mm

Forza di tenuta: 60 kg (100 libbre)

Tensione di ingresso : Doppia tensione 12/24 V CC

Adatto per porta: Porta in legno, Porta in vetro, Porta in metallo, Porta tagliafuoco

Uscita singola: Blocco singolo Stato NO/NC/COM//-


Caratteristica: Fail Safe, ritardo del timer, segnale di feedback, doppia tensione 12V/24VDC


PORTATO: Il rosso mostra sbloccato, il verde mostra bloccato

Il peso: 0,6 kg

Certificazione: CE/MA



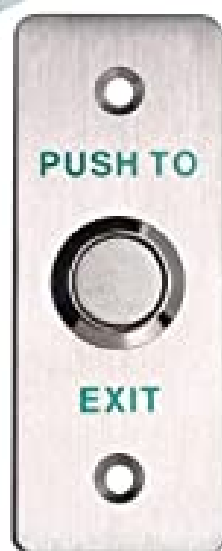

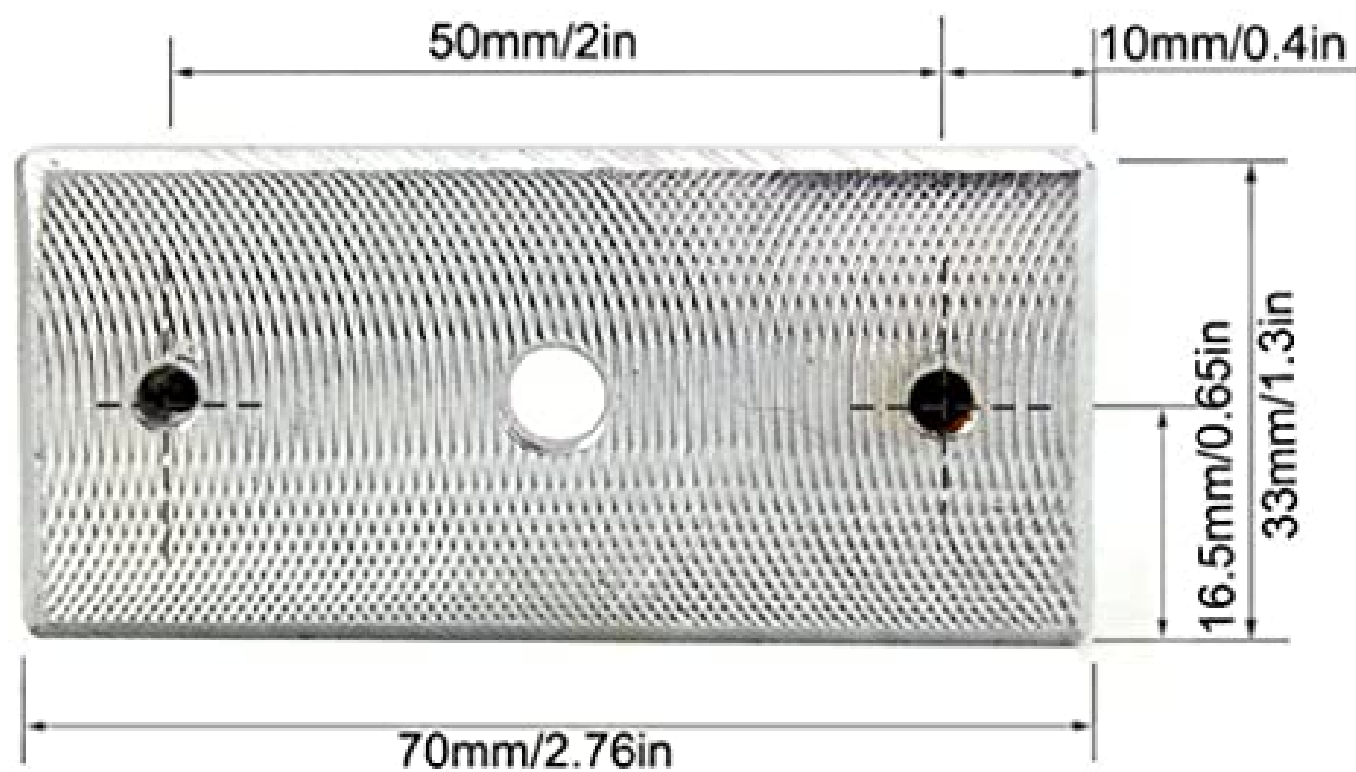




Dimension



Power 12VDC:

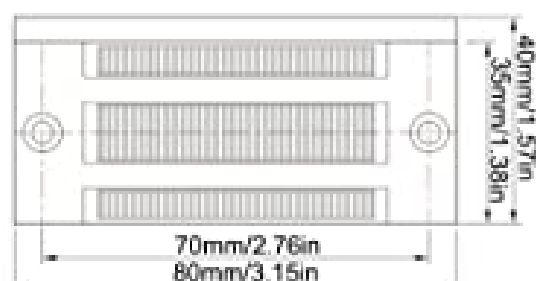


Armature Plate




⚠ Caution:

- A. The screw of armature plate should not be fixed too tight, proper elasticity should be guaranteed for the rubber ring so that the armature plate can adjust itself to the appropriate position.
- B. Please keep the surface of the lock clean, or the force will be reduced because of the dust, glue or scotch tape on it.


Installation

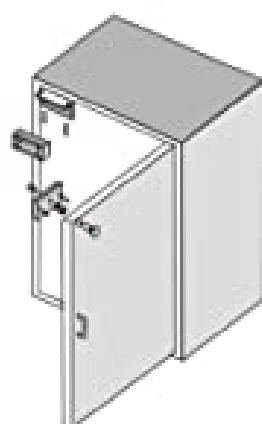

Demonstration of Standard Installation

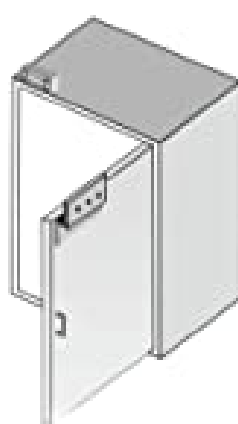

Demonstration of Z Bracket Installation

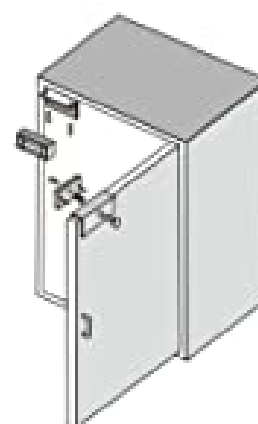







Demonstration of UL Bracket Installation



prodotti correlati



Re: Door Electromagnetic Magnetic EM Lock

				
Model: M60 Magnetic lock 60kg/120lbs	Model: YM180 Magnetic lock 180kg/300lbs	Model: M280 -2Pin Magnetic lock 280kg/600lbs	Model: M350 -2Pin Magnetic lock 350kg/800lbs	Model: M500 -2Pin Magnetic lock 500kg/1200lbs
				
Model: M180N -2Pin Mortise Concealed EM lock 180kg/300lbs	Model: M280N -2Pin Mortise Concealed EM lock 280kg/600lbs	Model: M350N -2Pin Mortise Concealed EM lock 350kg/800lbs	Model: M500N -2Pin Mortise Concealed EM lock 500kg/1200lbs	Model: ACM-280W Outdoor Waterproof Magnetic lock 280kg/600lbs
				
Model: M180D Double Door 180kg/300lbs Magnetic lock	Model: M280D Double Door 280kg/600lbs Magnetic lock	Model: M350D Double Door 350kg/800lbs Magnetic lock	Model: M500D Double Door 500kg/1200lbs Magnetic lock	Model: ACM-500W Outdoor Waterproof Magnetic lock 500kg/1200lbs

RE: Bracket used for Above Brand Magnetic EM Lock




ZL Bracket for
Magnetic EM Lock

Item#	ZL Bracket Dimension
M180ZL	Z bracket: 140*36*36mm
M280ZL M350ZL	L bracket: 250*50*30mm
M500ZL	Z= 185*70*63mm




ZL Bracket for
Magnetic EM Lock

Item#	ZL Bracket Dimension
M180Z	Z bracket: 140*36*36mm
M280Z M350Z	Z bracket: 180*50*50mm
M500Z	Z= 185*70*63mm



U Bracket for
Magnetic EM Lock

Item#	U Bracket Dimension
M180U	U bracket: 182*45*28mm
M280U M350U	L bracket: 140*33*25.5mm



L Bracket for
Magnetic EM Lock

Item#	U Bracket Dimension
M180L	L bracket: 168*38*24mm
M280L M350L	L bracket: 250*50*30mm
M280DL	L bracket For double door magnetic lock 600lbs
M500L	L=265*73*45mm

Whatsapp: +86-14554918707 , E-mail: lilyjiang_06@163.com, sales@goldbridgesz.com ; www.goldbridgesz.com

For More Products Price List and informations , Please contact our sales at sales@goldbridgesz.com, thank you !

Garanzia di qualità

- Il servizio di garanzia sarà onorato se il danno non è causato da persone, ACM Goldbridge fornisce 2 anni di garanzia per i relativi prodotti.
- Al contrario, ACM Goldbridge addebiterà un extra in caso di riparazione.
- Ulteriori informazioni, consultare il nostro centro servizi.

Schema di installazione

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.



3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.



4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).



7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.



11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

Imballaggio e consegna

Modo di spedizione

Abbiamo una forte collaborazione con DHL, FEDEX, TNT, UPS, EMS, spedizioniere via mare e via aerea

Puoi anche scegliere il tuo spedizioniere.

Confezione

Imballaggio con serratura magnetica: 1 unità per scatola, 5 pezzi per cartone,

Dimensioni del cartone: 35 x 30 x 16 cm, peso lordo: 25 kg.



You may need



ACM-Y280N

Blocco magnetico piastra posteriore (280 kg/600 libbre) Adatto per: porta in legno, porta in vetro, porta in metallo, fuoco | Porta di prova

ACM-Y180

Serratura magnetica montata su superficie (180 kg / 300 libbre) 2 bulloni Fail safe. Adatto per: porta in

legno, porta in vetro, porta in metallo,
porta a prova di fuoco.

ACM-Y280

Serratura magnetica per porta singola
da 280 kg (600 libbre) adatta per:
porta in legno, porta in vetro, porta in
metallo, porta a prova di fuoco.



ACM-Y280-L

Staffa a L per serratura magnetica da
280 kg/350 kg

ACM-Y180ZL

Staffa ZL per serratura magnetica da
180 kg/300 libbre

ACM-Y280-ZL

ZL Staffa per Serratura Magnetica
280Kg/350Kg

Nostro servizio

- 1, eventuali richieste riceveranno risposta entro 24 ore
- 2, produttore e fornitore professionale, benvenuto per visitare il nostro sito Web e la nostra fabbrica
- 3, OEM/ODM Disponibile
- 4, alta qualità, desing fashin, prezzo ragionevole e competitivo, tempi di consegna rapidi
- 5, servizio post-vendita:
 - 1), Tutti i prodotti saranno stati rigorosamente controllati in casa prima dell'imballaggio
 - 2), Tutti i prodotti saranno ben imballati prima della spedizione
 - 3), tutti i nostri prodotti hanno una garanzia di 2-3 anni se il danno non è causato dall'uomo
- 6, consegna più veloce : Circa 1 ~ 5 giorni per l'ordine del campione, 7 ~ 30 giorni per l'ordine all'ingrosso
- 7, pagamento: Puoi pagare l'ordine tramite: T/T, Western Union, Paypal.
- 8, spedizione: Abbiamo una forte collaborazione con DHL, FEDEX, TNT, UPS, EMS, spedizioniere via mare e via aerea, puoi anche scegliere il tuo spedizioniere.

FAQ

D: 1. Come posso effettuare un ordine?

A: Si prega di elencare le vostre esigenze via e-mail. Quindi ti invieremo l'offerta al più presto, dopo la conferma dell'ordine, organizzeremo la produzione al più presto.

D: 2. Che dire del pagamento e della spedizione?

A: TT/T, Paypal, Western Union.

I clienti possono scegliere via mare, aereo o espresso (DHL, FedEx, TNT UPS ecc.)

D: 3. Come posso ottenere un campione per verificare la qualità?

A: Potremmo fornirti un campione gratuito e il costo del trasporto pagato da te.

D:4. Quanto tempo posso aspettare per ottenere i campioni?

A: Dipende dalla quantità. Normalmente 3-7 giorni per 5000 pezzi e 7-15 giorni per 100.000 pezzi

D:5. I vostri prodotti possono essere personalizzati?

A: Quasi tutti i tuoi prodotti sono personalizzati, inclusi materiale, dimensioni, spessore e stampa. Gli ordini dell'OEM sono altamente benvenuti.

D: 6. Sei una società commerciale o una fabbrica?

Siamo uno dei maggiori produttori di schede RFID/tag NFC/keybod RFID/braccialetti RFID, lettori RFID e prodotti per il controllo degli accessi in Cina da oltre 20 anni.

20⁺ YEARS EXPERIENCE OEM & ODM

ACCESS CONTROL SYSTEMS ONE STOP SOLUTION PROVIDER

Goldbridge is Top 10 China Manufacture On Alibaba, Specializes In Provide Kinds Of RFID/NFC Cards, FID Tags, RFID Card Reader, UHF Reader, Access Control System, Electromagnetic Locks, etc Since 1999



Customized
Services



Quality
Assurance



Fast
Delivery



Best After-
Sales Service

OUR FACTORY



Access Control and RFID Reader Production Line:

- Monthly production quantity is up to 50,000pcs, We are Provides OEM&ODM services including product research and development, LOGO printing, customized.etc



Electromagnetic lock & Smart Door Lock Production Line :

- Monthly production quantity is up to 100,000pcs,
- Our factory is built with modern manufacture environment, facilities, equipment and professional operation technicians.
- Goldbridge Provides OEM&ODM services including product research and development, LOGO printing and product box customized.



RFID & NFC Cards & Tags Production Line :

- RFID Tag, Wristband, Keyfob: 11,000,000pcs (monthly output)
- Four Production Lines For Smart Card, PVC Card, Prelam Sheet: 20,000,000pcs (monthly output)
- Goldbridge Provides OEM&ODM services for LOGO printing, development, customized.

ADVANTAGE



WHY CHOOSE US?

- FAST DELIVERY** Faster delivery by air by express. (DHL, UPS or Fedex)
- LONG HISTORY** 20 years experience in RFID & Access Control industry
- OEM ACCEPTABLE** 20 years OEM&ODM experience for 1000 + VIP client from US and Europe
- HIGH QUALITY** Design and manufacture high quality products with 30 R&D; engineers.

APPLICATION

Bus, supermarket, school, government, hospital, factory



CERTIFICATE



