



[illegible]

1
9
L
☐ X
4
☐ 4
5
W
☐ X
1
1
H
☐ 1
3
5
☒ 4
☒ 9
☒ 2
2
☒ 2
1
2
☐
☐
☐
☒ 1
1
2
V
/
4
8
m
A
*
☐ 2
☐
☐
☐
V
☐ 1
/
2
4
m
A
*
2

$\frac{A^3}{3} - \frac{A^6}{6} + \frac{A^9}{9}$




产品特点

产品重量350x2kg/800x2mm
产品电压12V/24VDC
产品电压12VDC
MOV
产品重量
LED
产品重量NO / NC / COM
产品0/3/6/9
产品重量
产品重量
产品重量
产品重量
产品重量
产品重量CE
产品重量MA

产品OEM / ODM



产品重量LED
ACM-Y380D
PCB
12v/24v
7
PCB

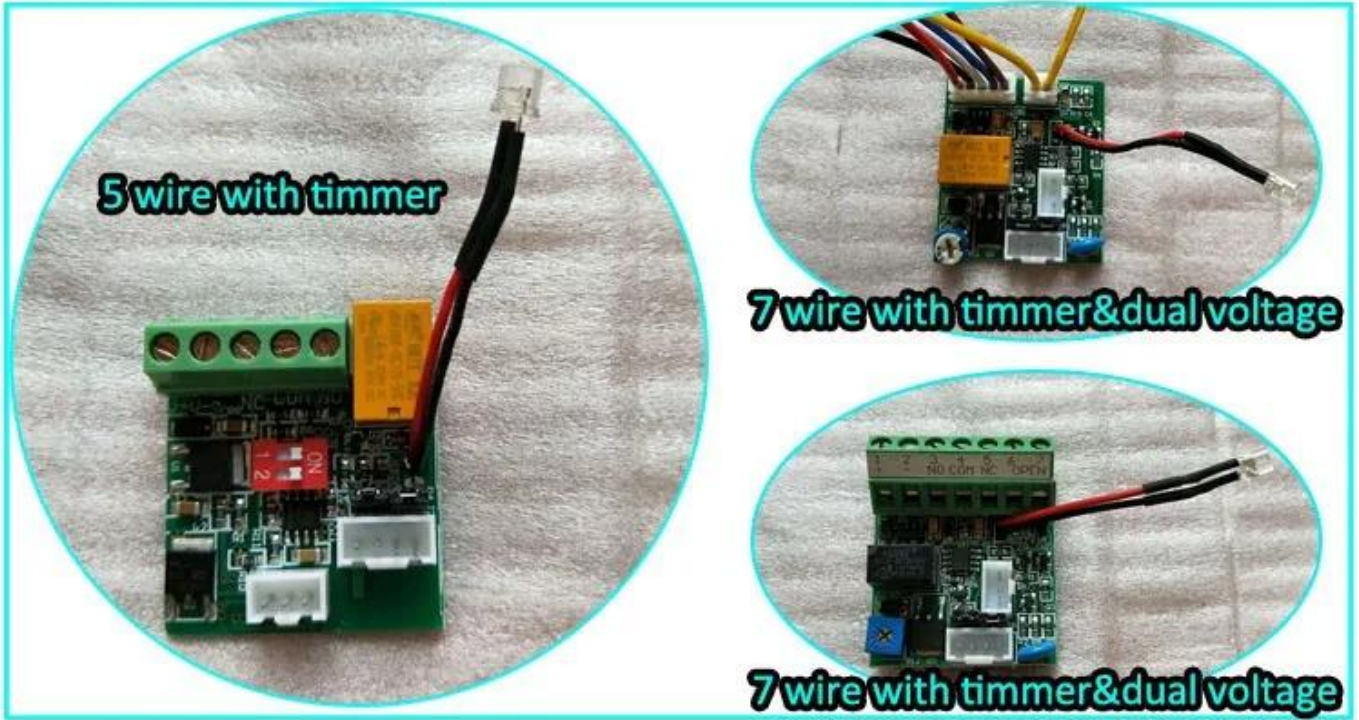

- 5-wire configuration with timer
- 7-wire configuration with timer and dual voltage
- 7-wire configuration with timer and dual voltage

##

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.



3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.



4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).



7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.



11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□□□

□□□□

□□□□DHL□FEDEX□TNT□UPS□EMS□SEA□□□□□□□□□□AIR□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□

□□

□□□□□□□□□□□□□□□□1□□□□□□□□□□□□5□□
□□□□□□□□35 * 30 * 16cm□□□□□□25kg□



You may need



ACM-Y280N

280kgs / 600lbs
|

ACM-Y180

180kg / 300lbs
2

ACM-Y280

280kg / 600lbs

□□□□□□□□□□□□□□□□□□



ACM-Y280-L
280kg / 350kg□□□□□□□□L□□□□□□

ACM-Y180ZL
180kg / 300lbs□□□□□□□□ZL□□□□□□

ACM-Y280-ZL
280Kg / 350Kg□□□□□□□□ZL□□□□□□

1□□□□□□□24□□□□□□□□□□

2

3. OEM / ODM 工厂

4

5□□□□□□□□

1

2

[illegible]

6 000 000 000 000 000 000 1 500 000 000 000 7 300

700000 00000000T / T00000000000Paypal0000000000

8000 DHL FEDEX TNT UPS EMS SEA AIR

--	--	--	--	--	--

Q1

A

Q2

A TT / T Paypal

□□□□□□□□□□□□□□□□DHL□FedEx□TNT UPS□□□□□□□□□□

Q3

A

Q4

A 5000 37 100,000 7 15

Q5

A _____ OEM _____

Q6

RFID / NFC / RFID / RFID RFID1