



280kgs / 600lbs mm mm em lcok withled / feedback mm

600lbs mm mm mm mm mm mm, mm mm mm, mm mm mm mm mm mm mm.
mm mm 12 mm 24 VDC mm mm mm mm.

mm
mm
mm
mm
mm
mm
5
6
L
x
8
1
mm
mm
mm
mm
4
6
H
(
m
m
)

1
8
L
X
3
3
8
W
X
4
4
H
.
(
m
m
)
2
8
k
g
x
0
0
0
L
b
s
x
2
)
1
2
/
2
4
4
V
D
C
.
0
0
0
0

1 2 V / 5 m A * 2 2 4 V / 2 5 m A * 2

[illegible]

-
1
~
+
5
5
C
0
0
0
~
1
3
1
F
)
0
0
0
0
0
0
0
0
0
0
0
5
K
9


Advanatge

- * 280kgx2,600poundsx2.
- * 12 24 VDC (00).
- * 12VDC000.
- * MOV 00 0 00 000 00000.
- * 00 00 00 00.
- * 000 00, 00 00 0 0000 000.
- * 000 0000 00.
- * 000, 00 00 0000 00000.
- * 00 000 CE 000, 00 0000 MA 000.

000 000, 000 OEM / ODM



ພື້ນ ພື້ນ ພື້ນ ພື້ນ LED ພື້ນພື້ນ, ພື້ນພື້ນ ພື້ນ ພື້ນ, ພື້ນ ພື້ນ ພື້ນ . ພື້ນ ພື້ນ ພື້ນ ພື້ນ ພື້ນ.
 ACM-Y280D ພື້ນ ພື້ນ ພື້ນ. PCB ພື້ນ ພື້ນ ພື້ນ ພື້ນ ພື້ນ. ພື້ນ 12v & 24v ພື້ນ ພື້ນ 7 ພື້ນ ພື້ນ ພື້ນ ພື້ນ ພື້ນ.
 ພື້ນ ພື້ນ PCB ພື້ນ ພື້ນ. ພື້ນ ພື້ນ ພື້ນພື້ນ ພື້ນ ພື້ນ ພື້ນພື້ນ. ພື້ນ ພື້ນ ພື້ນ ພື້ນ ພື້ນ ພື້ນ ພື້ນ.

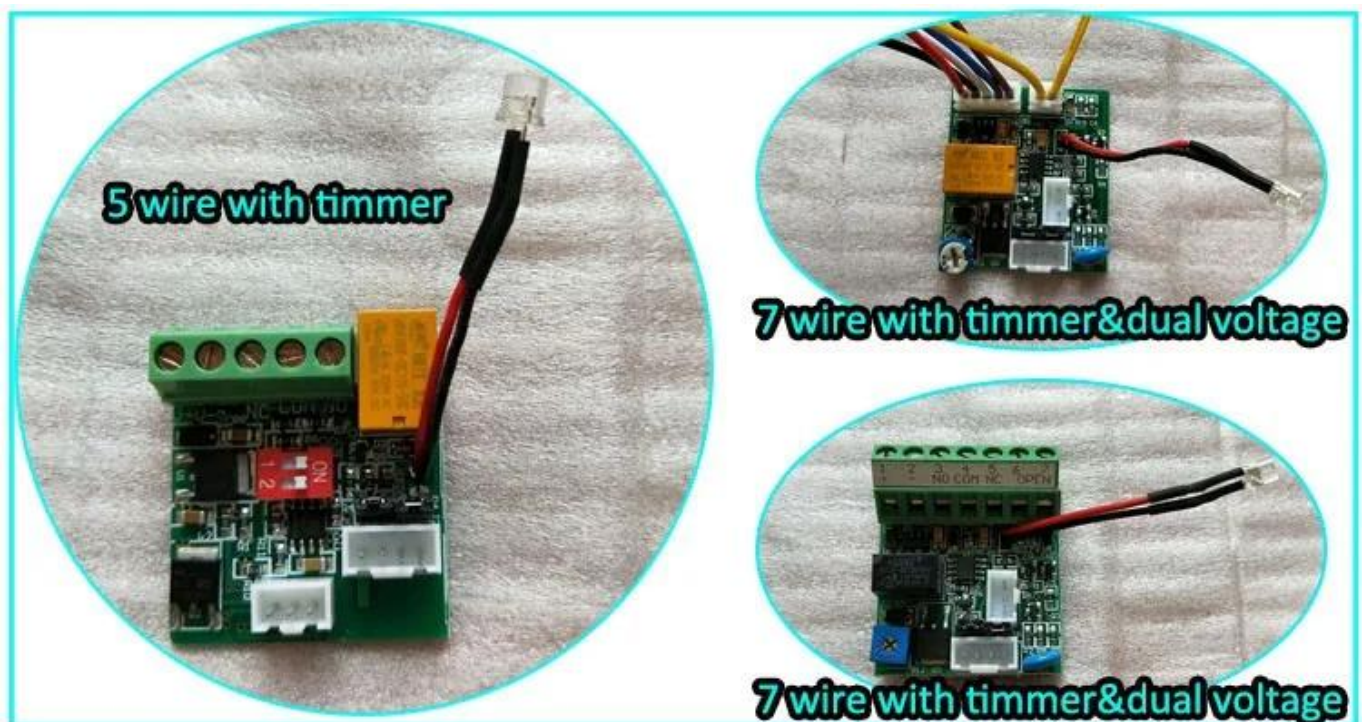

- በጣም ጥሩ የጥናት ሥልጣን ስላላቸው፣ ACM Goldbridgeን በጥሩ ሁኔታ 2 ሰዓት ማጥናት ይቻላል።
- በጣም ACM Goldbridgeን በጥሩ ሁኔታ ማጥናት ካስተማሩት።
- በጣም ጥሩ የጥናት ሥልጣን ስላላቸው።

በጣም ጥሩ የጥናት ሥልጣን ስላላቸው

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.



3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.



4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).



7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.



11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□ □ □□

□□ □□

□□□ DHL, FEDEX, TNT, UPS, EMS, SEA □ By AIR□□ □□ □□ □□ □□□□.
□□□ □□ □□□□ □□□ □□ □□□□.

□□

□□ □□□ □□ : □□ □ 1unit, □□ □ 5pcs,
□□ □□ : 35 * 30 * 16cm, □□□ : 25kg.



You may need



ACM-Y280N

280kgs (600lbs) 280kgs : 280kgs
280kgs, 280kgs, 280kgs, 280kgs

ACM-Y180

180kg (300lbs) 180kg : 180kg
2Bolts Fail safe. 180kg : 180kg, 180kg, 180kg, 180kg.

ACM-Y280

280kg (600lbs) □□ □□ □□□□ □□ □□ : □□□□
□ □, □□ □, □□ □, □□□ □.



ACM-Y280-L

280kg / 350kg □□ □□ □□ □ L □□□

ACM-Y180ZL

180kg / 300lbs □□□□ □□ □□ □ ZL □□□

ACM-Y280-ZL

280Kg / 350Kg □□□□ □□ □ ZL □□□

- 1, 20 24 20 20 20
- 2, 20 20 20 20 20 20 20 20 20 20.
- 3, 20 OEM / ODM
- 4, 20, fashin desing, 20 20 20 20, 20 20 20
- 5, 20 20 20 :
 - 1), 20 20 20 20 20 20 20 20 20 20.
 - 2), 20 20 20 20 20 20 20 20 20
 - 3), 20 20 20 20 20 20 20 20 20 20 2-3 20 20 20.
- 6, 20 20 : 20 20 20 1 ~ 5 20, 20 20 20 7 ~ 30 20
- 7, 20 : T / T, Western Union, Paypal 20 20 20 20 20 20.
- 8, 20 : 20 DHL, FEDEX, TNT, UPS, EMS, SEA 20 AIR 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20.

[illegible][illegible]

□□□ □□, □□ □□ □□□□ (DHL, FedEx, TNT UPS □)□ □□□ □ □□□□.

[illegible]

A: 100 0000 00 000 00 0 0 00, 000 00 0 00 00.

Q : 4. எந்த மனிதனின் புகழைப் போலிப் புகழ் என்று சொல்லுவீர்கள்?

A : □□□ □□ □□□□. □□□□□ 5000pcs □□ 3-7 □, 100,000pcs □□ 7-15 □

Q : 5. $\frac{1}{x^2} + \frac{1}{y^2} = \frac{1}{z^2}$ எனில் x , y மற்றும் z இன் மூலக்கோணம்?

[illegible]

Q : 6. ?

RFID / NFC / RFID / RFID, RFID