



350kgs / 800lbs 00 00 EM 0000 LCOK (LED 0 000 00 00)

0000 00 00000 00000 0, 0000000 0, 0000 0 0 00 00000 0000
0. 00 00 0000 00000 0000 0,3,6,9sec 0000 0 00000. LED
00 0, 00000 00 00 00000000 00000, 0000 00 00 00000 00000
0.

0
0
0
0
0
0
5
7
L
x
5
5
W
x
2
2
7
.
5
H
(
m
m
)

1
9
L
X
4
5
W
X
4
4
H
(
m
m
)
3
5
k
g
x
2
f
7
8
L
b
s
x
2
)
1
2
□
□
2
2
4
V
D
C

$$\frac{1}{2} V / 4 \cdot 8 \text{ mA} \cdot \frac{2}{4} V / 2 \cdot 4 \text{ mA} \cdot 2 \cdot \frac{3}{3} / \frac{6}{6} / 9$$

L E D

[illegible]

Advantage

350x2kg, 800x2pounds.

12 24 VDC ().

12VDC.

MOV .

, , , .

LED .

(NO / NC / COM).

: 0 / 3 / 6 / 9sec.

. .

, .

.

, .

CE , MA .


OEM / ODM



LED , , . .

ACM-Y380D . PCB . 12v & 24v 7 .

PCB . . .

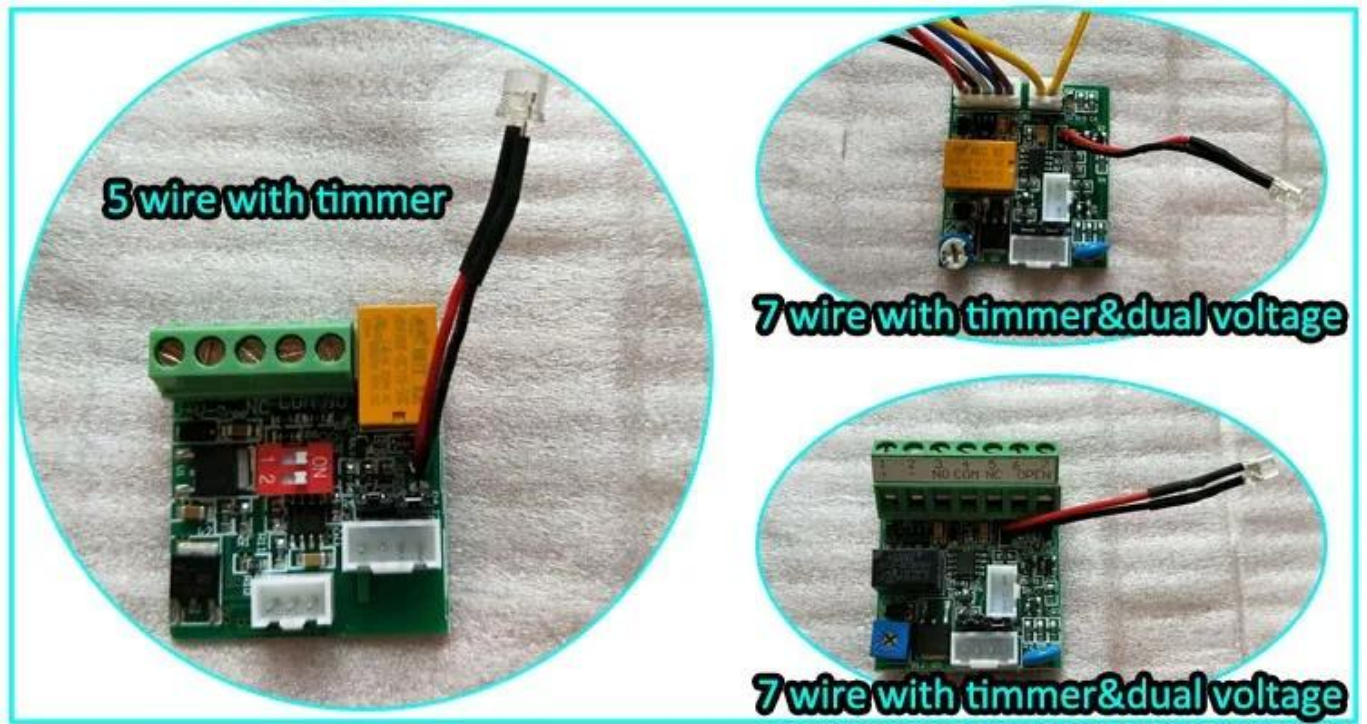

□□ □□

- □□ □□□ □□ □□ □□□□ □□□□, ACM Goldbridge□ □□ □□□ □□ 2 □ □□□ □□□□□.
- ACM Goldbridge□ □□ □ □□ □□□ cahrge□□□.
- □□□ □□ □□□ □□□ □□□□□□.

□□ □□□□□

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□ □ □□

□□ □□

□□□ DHL, FEDEX, TNT, UPS, EMS, SEA □ By AIR□□ □□ □□ □□ □□□□.
□□□ □□ □□□□ □□□ □□ □□□□.

□□

□□ □□□ □□ : □□ □ 1unit, □□ □ 5pcs,
□□ □□ : 35 * 30 * 16cm, □□□ : 25kg.



You may need



ACM-Y280N

280kgs (600lbs) 280kgs : 280kgs
280kgs, 280kgs, 280kgs, 280kgs

ACM-Y180

180kg (300lbs) 180kg : 180kg
2Bolts Fail safe. 180kg : 180kg, 180kg, 180kg, 180kg.

ACM-Y280

280kg (600lbs) □□ □□ □□□□ □□ □□ : □□□□
□ □, □□ □, □□ □, □□□ □.



ACM-Y280-L

280kg / 350kg □□ □□ □□ □ L □□□

ACM-Y180ZL

180kg / 300lbs □□□□ □□ □□ □ ZL □□□

ACM-Y280-ZL

280Kg / 350Kg □□□□ □□ □ ZL □□□

- 1, 20 2024 20 2024 2024
- 2, 20 2024 20 2024, 20 2024 20 2024 2024.
- 3, 2024 OEM / ODM
- 4, 2024, fashin desing, 2024 20 2024 2024, 20 20 2024
- 5, 20 20 2024 :
- 1), 20 2024 2024 20 2024 2024 20 2024 2024.
- 2), 20 2024 2024 20 20 20 2024
- 3), 2024 20 2024 2024 2024 20 2024 20 20 2-3 20 2024 2024.
- 6, 20 20 : 20 2024 20 1 ~ 5 20, 20 2024 20 7 ~ 30 20
- 7, 20 : T / T, Western Union, Paypal 20 20 2024 20 20 2024.
- 8, 20 : 2024 DHL, FEDEX, TNT, UPS, EMS, SEA 20 AIR 2024 2024 20 2024 20 2024 2024 20 2024 2024 20 2024.

Q : 1. $\frac{1}{x^2} = x^{-2}$ எனில் x இன் மதிப்பைக் காண்க?

Q : 2. ஸ்ரீ ஸ்ரீ ஸ்ரீ ஸ்ரீ?

Q : 3. ଶୁଦ୍ଧ ପ୍ରାୟୋଗିକ ସମସ୍ୟା କେଉଁଠି ଦେଖାଯାଇଥାଏ?

Q : 4. □□□ □□□ □□ □□ □ □□□?

[illegible]

Q : 6. பெரிய பூங்கா எங்கே உள்ளது?

RFID 20 年 前 開 發 出 來 的 技 術 已 經 在 各 個 行 業 中 得 到 了 廣 泛 的 應 用 。 在 這 些 應 用 中 ， 最 為 廣 泛 的 應 用 是 在 物 流 和 商 務 領 域 。